

SQUARE BEAM TUNABLE WHITE



9777 Reavis Park Drive

St. Louis, MO 63123

800.331.2425 or 314.631.6000

ADA Interior Sconce

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

Tunable White: LED option (TW) features tunable white technology that adjusts from 6500K-2700K. For proper control, fixture needs two 0-10V dimming controls.

LED Tuning: CCT tunable using 0-10V wall control. TRIAC, DALI, or DMX available upon request.

LED Dimming: Intensity adjustable using 0-10V wall control. TRIAC, DALI, or DMX available upon request.

LED Driver: Driver remotely mounted up to 10' from fixture body.


Body: Extruded aluminum wall plate and rails. Body hinges for easy serviceability.

Diffuser: Extruded polycarbonate lens is UL-94 HB Flame Class rated.

Standard Finishes: Highly durable oven cured no VOC premium powder coat.

Design: Aluminum die cast end caps and decorative bars.

Modified: Contact factory for modified lengths, lamping and decorative fronts.

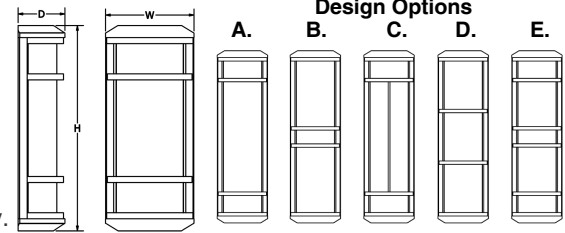

SAMPLE CATALOG NUMBER:					
GL-4471-	28TW-	S-	PA-	A-	A
MODEL NO.	LAMPING	DIFFUSER	FINISH	DESIGN	OPTION(S)
GL-4470 W in 7 1/4" mm 185 H in 17" mm 430 5lbs 2.3kg D in 3 7/8" mm 125	14TW	Standard: S. Satin White Polycarbonate is UL-94 HB Flame Class rated.	Standard: Powder Coat BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze PG -Pine Green DO -Deep Orange PV -Purple Violet NB -Navy Blue Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBZ -Textured Bronze TST -Stone Premium: SA -Satin Aluminum	Standard: A. Optional: B. C. D. E. Not available with GL-4470	A. No Options EL. Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.
GL-4471 W in 7 1/4" mm 185 H in 25" mm 635 7lbs 3.2kg D in 3 7/8" mm 125	14TW 28TW				
GL-4472 W in 7 1/4" mm 185 H in 37" mm 940 10lbs 4.5kg D in 3 7/8" mm 125	21TW 42TW				
GL-4473 W in 7 1/4" mm 185 H in 49" mm 1245 14lbs 6.3kg D in 3 7/8" mm 125	28TW 56TW				

All dimensions are nominal.

Light Source Definition

Code	Total Wattage	Delivered Lumens	Kelvin
14TW	14W	1333	2700-6500
21TW	21W	2095	2700-6500
28TW	28W	2690	2700-6500
42TW	42W	4191	2700-6500
56TW	56W	5764	2700-6500

Universal Voltage unless otherwise specified.