

# SQUARE BEAM

## ADA Interior Sconce




9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs are field serviceable.
- LED Dimming:** 0-10V dimming standard.
- Body:** Extruded aluminum wall plate and rails. Body hinges for easy serviceability.
- Diffuser:** Extruded polycarbonate lens is UL-94 HB Flame Class rated.
- Standard Finishes:** Highly durable oven cured no VOC premium powder coat.
- Design:** Aluminum die cast end caps and decorative bars.
- Modified:** Contact factory for modified lengths, lamping and decorative fronts.

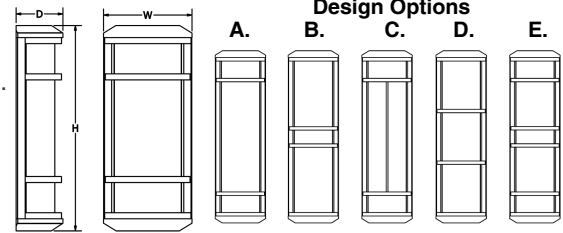

SAMPLE CATALOG NUMBER:					
GL-4471-	H-	S-	PA-	A-	A
MODEL NO.	LAMPING	DIFFUSER	FINISH	DESIGN	OPTION(S)
<b>GL-4469</b> W in 7 1/4" mm 185 H in 12" mm 305 3lbs 1.8kg D in 3 7/8" mm 125	<b>AK.</b> 10LED30 <b>AL.</b> 10LED35 <b>AM.</b> 10LED40	<b>Standard:</b> <b>S.</b> Satin White  Polycarbonate is UL-94 HB Flame Class rated.	<b>Standard:</b> Powder Coat <b>BLK-</b> Black <b>BL-</b> Blue <b>GR-</b> Gray <b>LG-</b> Light Gray <b>BE-</b> Beige <b>PAB-</b> Antique Brass <b>PA-</b> Painted Aluminum <b>PTC-</b> Painted Copper <b>WH-</b> White <b>DBZ-</b> Dark Bronze <b>NSN-</b> New Satin Nickel <b>BRN-</b> Brown <b>RD-</b> Red <b>CH-</b> Champagne <b>RG-</b> Reed Green <b>SG-</b> Sungold <b>GM-</b> Gun Metal <b>POR-</b> Oil Rubbed Bronze <b>PG-</b> Pine Green <b>DO-</b> Deep Orange <b>PV-</b> Purple Violet <b>NB-</b> Navy Blue  <b>Textured Powder</b> <b>TLV-</b> Light Verdigris <b>TWH-</b> Textured White <b>TBL-</b> Textured Black <b>TS-</b> Textured Silver <b>TBZ-</b> Textured Bronze <b>TST-</b> Stone  <b>Premium:</b> <b>SA-</b> Satin Aluminum	<b>Standard:</b> <b>A.</b> <b>Optional:</b> <b>B.</b> <b>C.</b> <b>D.*</b> <b>E.*</b>  *D&E not available with GL-4469. *E not available with GL-4470.	<b>A.</b> No Options <b>EL.</b> Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage. <b>IEL.</b> Integral Emergency LED Integrally mounted emergency driver. GL-4471 - GL-4473 only. For applications with ambient operating temperatures between 32°-131°F.
<b>GL-4470</b> W in 7 1/4" mm 185 H in 17" mm 430 5lbs 2.3kg D in 3 7/8" mm 125	<b>A.</b> 14LED30 <b>B.</b> 14LED35 <b>C.</b> 14LED40				
<b>GL-4471</b> W in 7 1/4" mm 185 H in 25" mm 635 7lbs 3.2kg D in 3 7/8" mm 125	<b>D.</b> 14LED30 <b>E.</b> 14LED35 <b>F.</b> 14LED40 <b>G.</b> 28LED30 <b>H.</b> 28LED35 <b>I.</b> 28LED40				
<b>GL-4472</b> W in 7 1/4" mm 185 H in 37" mm 940 10lbs 4.5kg D in 3 7/8" mm 125	<b>K.</b> 21LED30 <b>L.</b> 21LED35 <b>M.</b> 21LED40 <b>N.</b> 42LED30 <b>O.</b> 42LED35 <b>P.</b> 42LED40				
<b>GL-4473</b> W in 7 1/4" mm 185 H in 49" mm 1245 14lbs 6.3kg D in 3 7/8" mm 125	<b>R.</b> 28LED30 <b>S.</b> 28LED35 <b>T.</b> 28LED40 <b>U.</b> 56LED30 <b>V.</b> 56LED35 <b>W.</b> 56LED40				

All dimensions are nominal.

### Light Source Definition

Lamp	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Lamp	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
10LED30	10W	95	50000	687	3000	28LED30	28W	80	50000	2690	3000
10LED35	10W	95	50000	687	3500	28LED35	28W	80	50000	2690	3500
10LED40	10W	95	50000	687	4000	28LED40	28W	80	50000	2690	4000
14LED30	14W	80	50000	1333	3000	42LED30	42W	80	50000	4191	3000
14LED35	14W	80	50000	1333	3500	42LED35	42W	80	50000	4191	3500
14LED40	14W	80	50000	1333	4000	42LED40	42W	80	50000	4191	4000
21LED30	21W	80	50000	2095	3000	56LED30	56W	80	50000	5764	3000
21LED35	21W	80	50000	2095	3500	56LED35	56W	80	50000	5764	3500
21LED40	21W	80	50000	2095	4000	56LED40	56W	80	50000	5764	4000

