

# STOCKPORT

## Interior ADA Sconce



9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

**LED:** High efficiency mid-power LEDs are field serviceable.

**LED Dimming:** Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request. Integral driver.



**Body:** Spun .050 aluminum or 18ga steel.

**Acrylic:** Seamless acrylic is UL-94 HB Flame Class rated.

**Finish:** Highly durable oven cured no VOC premium powder coat.

**Modifications:** Consult factory for lamping options.

**Surge Protection:** External surge protector provided as standard.

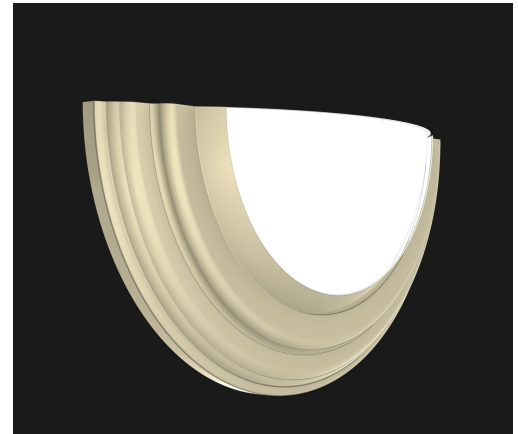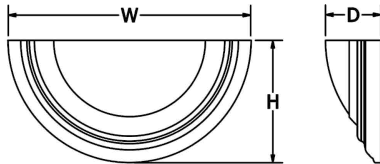

SAMPLE CATALOG NUMBER:					
GL-4090-		L15-	W-	SN-	A
MODEL NO.		LAMPING	ACRYLIC	FINISH	OPTION(S)
<b>GL-4090</b> W in 16" mm 405 H in 8" mm 205 5lbs 2.3kg D in 4" mm 100	<b>L10.</b> 1LED30 <b>L15.</b> 1LED35 <b>L14.</b> 1LED40	<b>Standard:</b> W. White Opal  <b>Optional:</b> S. Satin White F. Faux Alabaster M. Earth Marble	<b>Standard:</b> Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze PG-Pine Green DO-Deep Orange PV-Purple Violet NB-Navy Blue  <b>Textured Powder</b> TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBZ-Textured Bronze TST-Stone  <b>Premium:</b> SA-Satin Aluminum SB-Satin Brass PB-Polished Brass AB-Antique Brass ORB-Oil Rubbed Bronze SC-Satin Chrome SN-Satin Nickel PC-Polished Copper SA-Satin Aluminum	<b>A. No Options</b> <b>EL. Emergency LED</b> Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage. <b>L. Perforated Top Lens</b> Painted white perforated metal top lens. <b>TL. Acrylic Top Lens</b> White acrylic top lens.	
					<b>GL-4091</b> W in 23" mm 790 H in 11 1/2" mm 290 7lbs 3.2kg D in 4" mm 100

All dimensions are nominal.

### Light Source Definition

Code	Total Wattage	CRI	Rated Life Hrs	Board Lumens	Kelvin
L10	14	+80	50000	1895	3000
L15	14	+80	50000	1895	3500
L14	14	+80	50000	1895	4000

Universal Voltage unless otherwise specified.