

TUCSON

Interior ADA Sconce





9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs.
- LED Dimming:** Integral 1% 0-10V dimming driver standard.
- Acrylic:** Acrylic is UL-94 HB Flame Class rated.
- Diffuser:** Standard perforated white top and bottom diffuser.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Custom:** Contact factory for custom lengths and lamping.
- Surge Protection:** External surge protector provided as standard.

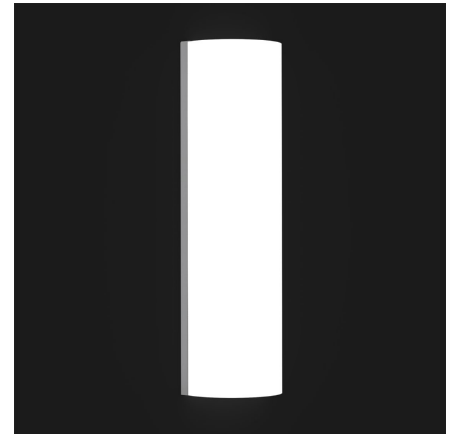

SAMPLE CATALOG NUMBER:					
GL-4634-		B5-	W-	NSN-	A
MODEL NO.	LAMPING	ACRYLIC	FINISH	OPTION(S)	
GL-4634 W 5 3/4" in 145 mm H 13 1/4" in 335 mm 5lbs D 4" in 100 mm 2.3kg	B0. 1LED30 B5. 1LED35 B4. 1LED40	Standard: W. White Opal Optional: S. Satin White F. Faux Alabaster M. Earth Marble Acrylic is UL-94 HB Flame Class rated.	Standard: Powder Coat BLK- Black BL- Blue GR- Gray LG- Light Gray BE- Beige PAB- Antique Brass PA- Painted Aluminum PTC- Painted Copper WH- White DBZ- Dark Bronze NSN- New Satin Nickel BRN- Brown RD- Red CH- Champagne RG- Reed Green SG- Sungold GM- Gun Metal POR- Oil Rubbed Bronze PG- Pine Green DO- Deep Orange PV- Purple Violet NB- Navy Blue Textured Powder TLV- Light Verdigris TWH- Textured White TBL- Textured Black TS- Textured Silver TBZ- Textured Bronze TST- Stone	A. No Options EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.	
GL-4635 W 5 3/4" in 145 mm H 19" in 480 mm 6lbs D 4" in 100 mm 2.7kg	B0. 1LED30 B5. 1LED35 B4. 1LED40				
GL-4636 W 5 3/4" in 145 mm H 24" in 610 mm 7lbs D 4" in 100 mm 3.2kg	G0. 2LED30 G5. 2LED35 G4. 2LED40				

All dimensions are nominal.

Light Source Definition

Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
1LED30	14	+80	50000	1950	3000
1LED35	14	+80	50000	1950	3500
1LED40	14	+80	50000	1950	4000
2LED30	28	+80	50000	3900	3000
2LED35	28	+80	50000	3900	3500
2LED40	28	+80	50000	3900	4000

Universal Voltage unless otherwise specified.