

VOYAGER

Indoor Pendant



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs are field serviceable.

LED Dimming: Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request.

Down Light: 90CRI 17 watt 2000 lumen module. Lamping code ending with "DL" includes downlight.

Body: 1/8" aluminum body. White powder coated metal cap with non-downlight lamping options.



Canopy: Matches fixture finish. Low profile canopy may be mounted on flat or sloped ceilings up to 40°. Available stem or field adjustable cord and cable.

Cable Hanger Option: Supplied with standard 72" white cord and cable. Field adjustable.

Finish: Highly durable oven cured no VOC premium powder coat.

Modifications: Consult factory for lamping or cluster options.

Surge Protection: External surge protector provided as standard.

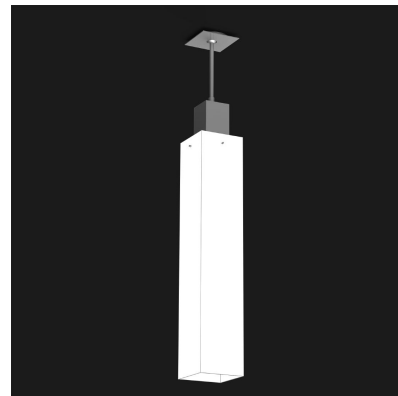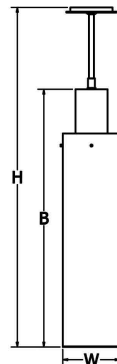

SAMPLE CATALOG NUMBER:						
GL-2515-	N-	W-	NSN-	1-	A-	042
MODEL NO.	LAMPING	ACRYLIC	FINISH	HANGER	OPTION(S)	OVERALL HEIGHT
GL-2515 W in 7" mm 180 B in 32" mm 810 12lbs 5.5kg Fixture does not include downlight	M. 4LED30 N. 4LED35 O. 4LED40	Standard: W White Opal S Satin White Acrylic is UL-94 HB Flame Class rated.	Standard: Powder Coat BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze PG -Pine Green DO -Deep Orange PV -Purple Violet NB -Navy Blue Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBZ -Textured Bronze TST -Stone Premium: SA -Satin Aluminum	1. Stem Remote driver. 2. Cable Standard white power cord. Remote driver.	A. No Options BC. Black Cord Fixture supplied with black power cord. LC. 150" Cord & Cable Fixture supplied with 150" of cable and standard white cord or optional black cord. EL. Emergency LED Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.	Stem mount only - Specify overall height in inches. Standard overall height shown by model no.
GL-2516 W in 7" mm 180 B in 42" mm 1065 20lbs 9kg Fixture does not include downlight	P. 8LED30 Q. 8LED35 R. 8LED40			3. Oversized with Stem 12" Canopy 4. Oversized with Cable Standard white power cord. 12" Canopy.	Hanger options 1&2 supplied with remote driver box.	
GL-2517 W in 7" mm 180 B in 62" mm 1575 30lbs 13.5kg V, W, X lamping includes downlight	S. 8LED30 T. 8LED35 U. 8LED40 V. 8LED30DL W. 8LED35DL X. 8LED40DL					

All dimensions are nominal.

Light Source Definition

Code	Total Wattage	Delivered Lumens	Kelvin	Code	Total Wattage	Delivered Lumens	Kelvin	Code	*Total Wattage	*Delivered Lumens	Kelvin
M	52W	4601	3000	S	104W	9053	3000	V	128W	11053	3000
N	52W	4601	3500	T	104W	9053	3500	W	128W	11053	3500
O	52W	4601	4000	U	104W	9053	4000	X	128W	11053	4000
P	80W	7049	3000								
Q	80W	7049	3500								
R	80W	7049	4000								

Universal Voltage unless otherwise specified.

*Includes downlight wattage (17W) and lumen output (1692lm)