

ZIRCON - Up & Down Light

Interior LED Pendant

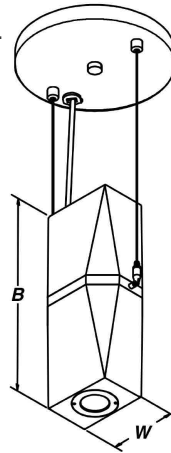




9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

- LED:** High efficiency high-power LEDs. Universal 120-277V input voltage.
- LED Dimming:** Standard 1% 0-10V dimming.
- Driver:** Max remote driver installation distance: 25ft from fixture body.
- Body:** Cast aluminum.
- Cord Hanger Option:** Standard 72" white cord for on-site adjustability.
- Canopy:** Matches fixture finish.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Surge Protection:** External surge protector provided as standard.
- Modified:** Contact factory for modified lumen packages.



SAMPLE CATALOG NUMBER:							
MODEL NO.	LAMPING DOWN	LAMPING UP	OPTIC DOWN	OPTIC UP	FINISH	HANGER	OPTION(S)
GL-6622 W 4 1/2" 4lbs B 6" 1.8kg H 8-72"	A. 1LED30 B. 1LED35 C. 1LED40 D. 1LED30HO E. 1LED35HO F. 1LED40HO	A. 1LED30 B. 1LED35 C. 1LED40	Down R2. 20deg R3. 30deg R5. 50deg	Up R2. 20deg R3. 30deg R5. 50deg	Standard: Powder Coat BLK- Black BL- Blue GR- Gray LG- Light Gray BE- Beige PAB- Antique Brass PA- Painted Aluminum PTC- Painted Copper WH- White DBZ- Dark Bronze NSN- New Satin Nickel BRN- Brown RD- Red CH- Champagne RG- Reed Green SG- Sungold GM- Gun Metal POR- Oil Rubbed Bronze PG- Pine Green DO- Deep Orange PV- Purple Violet NB- Navy Blue Textured Powder TLV- Light Verdigris TWH- Textured White TBL- Textured Black TS- Textured Silver TBZ- Textured Bronze TST- Stone Premium: SA- Satin Aluminum	1. Cable Mount Remote Driver  Drivers mounted remotely 2. Cable Mount Oversized Canopy  Drivers mounted inside 10.125" dia oversized canopy	A. No Options BC. Black Cord Fixture supplied with black power cord. EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage. 2C. Two Circuit Fixture wired with two circuits. Standard with HO lamping options. LC. 150" Cord & Cable Fixture supplied with 150" of cable and standard white cord or optional black cord.
GL-6623 W 4 1/2" 6lbs B 12" 2.7kg H 14-72"	A. 1LED30 B. 1LED35 C. 1LED40 G. 1LED30HO H. 1LED35HO I. 1LED40HO	A. 1LED30 B. 1LED35 C. 1LED40					

All dimensions are nominal.

Light Source Definition

CODE	LED	Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
A	1LED30	13W	+80	50000	1350	3000
B	1LED35	13W	+80	50000	1350	3500
C	1LED40	13W	+80	50000	1350	4000
D	1LED30HO	18W	+80	50000	1909	3000
E	1LED35HO	18W	+80	50000	1909	3500
F	1LED40HO	18W	+80	50000	1909	4000
G	1LED30HO	26W	+80	50000	2566	3000
H	1LED35HO	26W	+80	50000	2566	3500
I	1LED40HO	26W	+80	50000	2566	4000

Universal Voltage unless otherwise specified.