

MARINA II RGB+WHITE

Interior Round Semi-Surface Mount



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

RGB+White: LED option (RGB30, RGB35, & RGB40) features a full power white and RGB color changing light source. A second circuit controls the white channel. RGB channel wired DMX ready, full white 1% 0-10V dimming standard.

RGB: LED option features RGB color changing light source. RGB channel wired DMX ready.

Static Color: LED options (Red, Green, or Blue) feature static color.


Shade: Standard white fabric shade with integral satin white diffuser. Custom shapes, sizes, and colors available.

Finish: Highly durable oven cured no VOC premium powder coat.

DMX: Controls by others.

Surge Protection: External surge protector provided as standard.


Standard textured white finish



| SAMPLE CATALOG NUMBER: GL-3742- | | | | HH- | W- | A | |
|------------------------------------|------------------------|-------------------|-----------------|--|---|---|--|
| MODEL NO. | | | | LAMPING | SHADE | OPTIONS | |
| GL-3742 | W in 24" D in 11.5" | mm 610 mm 295 | 15lbs 7kg | DD. RED EE. GREEN FF. BLUE GG. RGB* | HH. RGB30* II. RGB35* JJ. RGB40* | W White C Cream BL Blue BK Black S Stone R Red Washable: WW White WC Cream WLG Lt Gray WGR Gray WBK Black WR Red WBL Blue <small>Shade options may vary based on availability. Consult Finish Guide at glighting.com for current options.</small> | A. No Options EL. Emergency LED <small>Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.</small> |
| GL-3743 | W in 30" D in 12.5" | mm 760 mm 320 | 18lbs 8kg | KK. RED LL. GREEN MM. BLUE NN. RGB* | OO. RGB30* PP. RGB35* QQ. RGB40* | | |
| GL-3744 | W in 36" D in 13.5" | mm 915 mm 340 | 20lbs 9kg | RR. RED SS. GREEN TT. BLUE UU. RGB* | VV. RGB30* WW. RGB35* XX. RGB40* | | |
| GL-3745 | W in 48" D in 15.5" | mm 1220 mm 395 | 25lbs 11.5kg | YY. RED ZZ. GREEN AB. BLUE AC. RGB* | AD. RGB30* AE. RGB35* AF. RGB40* | | |

All Dimensions are nominal.
*DMX controls supplied by others.

Shade

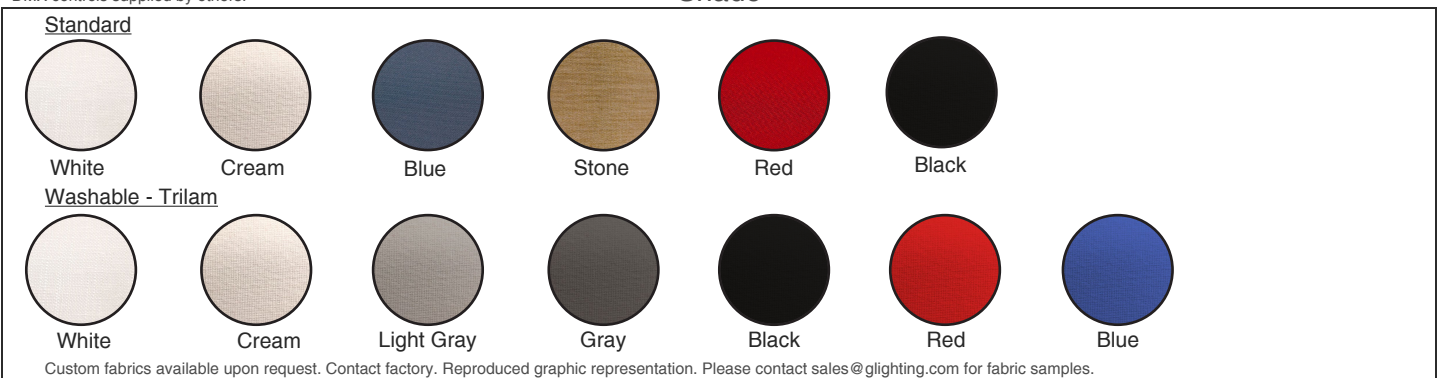

Light Source Definition

| Fixture | Total Wattage | CRI | Rated Life Hrs | Delivered Lumens |
|---------|---------------|-----|----------------|------------------|
| GL-3742 | 72 | +80 | 50000 | 7436 |
| GL-3743 | 72 | +80 | 50000 | 7436 |
| GL-3744 | 114 | +80 | 50000 | 12248 |
| GL-3745 | 114 | +80 | 50000 | 12248 |

Universal Voltage unless otherwise specified.