

TAHOE II WARM DIM

Interior Square Pendant



9777 Reavis Park Drive

St. Louis, MO 63123

800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

Tunable White: LED option (TW) features tunable white technology that adjusts from 6500K-2700K. For proper control, fixture needs two 0-10V dimming controls.

LED Tuning: CCT tunable using 0-10V wall control. TRIAC, DALI, or DMX available upon request.

LED Dimming: Intensity adjustable using 1% 0-10V wall control. TRIAC, DALI, or DMX available upon request.


Shade: Standard white fabric shade with integral satin white diffuser.

Canopy: Matches fixture finish. Low profile canopy may be mounted on flat or sloped ceilings up to 40°. Available stem or field adjustable cord and cable.

Cable Hanger Option: Supplied with standard 72" white cord and cable. Field adjustable.

Finish: Highly durable oven cured no VOC premium powder coat.


Surge Protection: External surge protector provided as standard.



SAMPLE CATALOG NUMBER:						
GL-2732-	WD5-	W-	NSN-	1-	A-	023
MODEL NO.	LAMPING	SHADE	FINISH	HANGER	OPTIONS	OVERALL HEIGHT
GL-2732 W in 24" 15lbs D in 11.5" 7kg H in 23"	WD5	W White C Cream BL Blue BK Black S Stone R Red	Standard: Powder Coat BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze PG -Pine Green DO -Deep Orange PV -Purple Violet NB -Navy Blue Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBZ -Textured Bronze TST -Stone	1. Stem 5. Cord & Cable Supplied with white cord with hanger option 5.	A. No Options BC. Black Cord Fixture supplied with black power cord. EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage. LC. 150" Cord & Cable Supplied with 150" Cord & Cable.	Specify overall height for stem hanger option in inches.
GL-2733 W in 30" 18lbs D in 12.5" 8kg H in 24"	WD5	Washable: WW White WC Cream WLG Lt Gray				
GL-2734 W in 36" 20lbs D in 13.5" 9kg H in 25"	WD8	WGR Gray WBK Black WR Red WBL Blue				
GL-2735 W in 48" 25lbs D in 15.5" 11.5kg H in 27"	WD8	Shade options may vary based on availability. Consult Finish Guide at glighting.com for current options.				

All Dimensions are nominal.

Shade

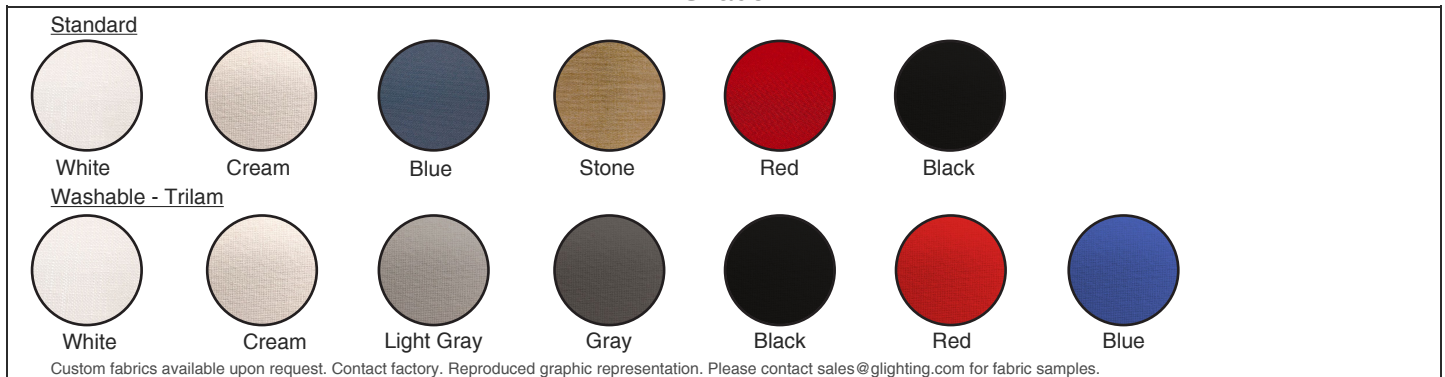

Light Source Definition

Code	Total Wattage	Delivered Lumens	Kelvin
WD5	107	7736	3500-1800
WD8	170	12248	3500-1800

Universal Voltage unless otherwise specified.