

# TAHOE II RGB+WHITE

## Interior Square Semi-Surface Mount



9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

**RGB+White:** LED option (RGB30, RGB35, & RGB40) features a full power white and RGB color changing light source. A second circuit controls the white channel. RGB channel wired DMX ready, full white 1% 0-10V dimming standard.

**RGB:** LED option features RGB color changing light source. RGB channel wired DMX ready.



**Static Color:** LED options (Red, Green, or Blue) feature static color.

**Shade:** Standard white fabric shade with integral satin white diffuser. Custom shapes, sizes, and colors available.

**Finish:** Highly durable oven cured no VOC premium powder coat.

**DMX:** Controls by others.


**Surge Protection:** External surge protector provided as standard.

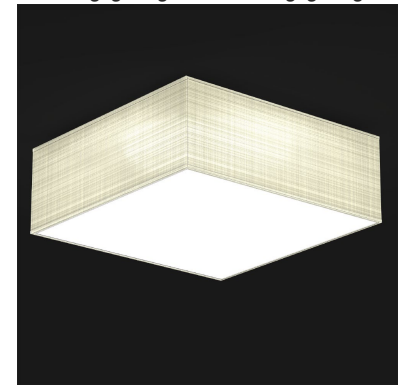

SAMPLE CATALOG NUMBER: GL-3732-				HH-	W-	A	
MODEL NO.				LAMPING	SHADE	OPTIONS	
<b>GL-3732</b>	W in 24"	mm 610	15lbs 7kg	<b>DD.</b> RED <b>EE.</b> GREEN <b>FF.</b> BLUE <b>GG.</b> RGB*	<b>HH.</b> RGB30* <b>II.</b> RGB35* <b>JJ.</b> RGB40*	<b>W</b> White <b>C</b> Cream <b>BL</b> Blue <b>BK</b> Black <b>S</b> Stone <b>R</b> Red  Washable: <b>WW</b> White <b>WC</b> Cream <b>WLG</b> Lt Gray <b>WGR</b> Gray <b>WBK</b> Black <b>WR</b> Red <b>WBL</b> Blue  <small>Shade options may vary based on availability. Consult Finish Guide at glighting.com for current options.</small>	<b>A.</b> No Options <b>EL.</b> Emergency LED <small>Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.</small>
<b>GL-3733</b>	W in 30"	mm 760	18lbs 8kg	<b>KK.</b> RED <b>LL.</b> GREEN <b>MM.</b> BLUE <b>NN.</b> RGB*	<b>OO.</b> RGB30* <b>PP.</b> RGB35* <b>QQ.</b> RGB40*		
<b>GL-3734</b>	W in 36"	mm 915	20lbs 9kg	<b>RR.</b> RED <b>SS.</b> GREEN <b>TT.</b> BLUE <b>UU.</b> RGB*	<b>VV.</b> RGB30* <b>WW.</b> RGB35* <b>XX.</b> RGB40*		
<b>GL-3735</b>	W in 48"	mm 1220	25lbs 11.5kg	<b>YY.</b> RED <b>ZZ.</b> GREEN <b>AB.</b> BLUE <b>AC.</b> RGB*	<b>AD.</b> RGB30* <b>AE.</b> RGB35* <b>AF.</b> RGB40*		

All Dimensions are nominal.  
\*DMX controls supplied by others.

### Shade

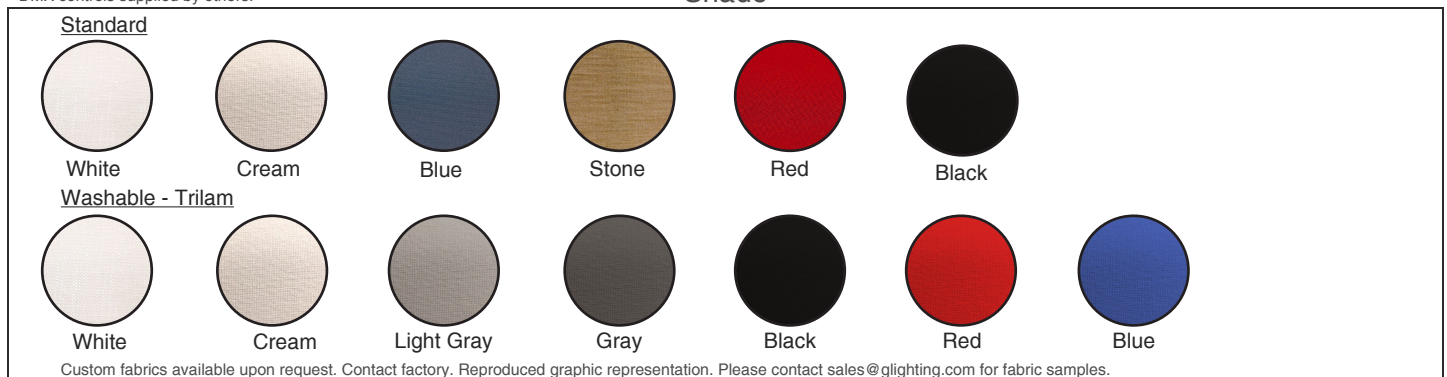

### Light Source Definition

Fixture	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens
GL-3742	72	+80	50000	7436
GL-3743	72	+80	50000	7436
GL-3744	114	+80	50000	12248
GL-3745	114	+80	50000	12248

Universal Voltage unless otherwise specified.