

GLOBO RGB+W

Acrylic Globe Indoor Pendant



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

RGB+White: LED option (RGB30, RGB35, & RGB40) features a full power white and RGB color changing light source. A second circuit controls the white channel. RGB channel wired DMX ready, full white 1% 0-10V dimming standard.

RGB: LED option features RGB color changing light source. RGB channel wired DMX ready.

Static Color: LED options (Red, Green, or Blue) feature static color.



Acrylic: White acrylic with seam is UL-94 HB Flame Class rated.


Cable Hanger: Comes with 72" cable and cord for on-site adjustability. Canopy painted textured white.

Finish: Highly durable oven cured no VOC premium powder coat.

DMX: Controls by others.

Surge Protection: External surge protector provided as standard.

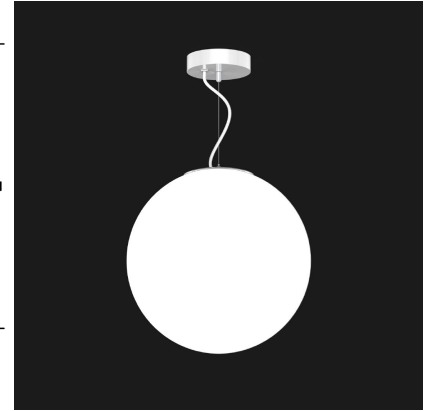

SAMPLE CATALOG NUMBER: GL-2801-		Q-	1-	A
MODEL NO.		LAMPING	HANGER	OPTIONS
GL-2801	W in 24" mm 610 30lbs B in 24" mm 610 13.5kg H in 30"-90" mm 760-2285 Fixture Painted Textured White	L. RED M. GREEN N. BLUE O. RGB* P. RGB30* Q. RGB35* R. RGB40*	1. Cable 	A. No Options LC. 150" Cord & Cable Supplied with 150" Cord & Cable. EL. Emergency Ballast Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
GL-2802	W in 30" mm 760 40lbs B in 30" mm 760 18kg H in 36"-96" mm 915-2440 Fixture Painted Textured White	S. RED T. GREEN U. BLUE V. RGB* W. RGB30* X. RGB35* Y. RGB40*		

All Dimensions are nominal.
*DMX controls supplied by others.

Light Source Definition

Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens
GL-2801	42	+80	50000	4912
GL-2802	56	+80	50000	6321

Universal Voltage unless otherwise specified.