

GLOBO WARM DIM

Acrylic Globe Indoor Pendant



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

Warm Dim: LED option (WD) features warm dimming technology that dims smoothly from 3500K-1800K with standard 1% 0-10V dimming.



LED Dimming: Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request.


Acrylic: White acrylic with seam is UL-94 HB Flame Class rated.

Cable Hanger: Comes with 72" cable and cord for on-site adjustability. Canopy painted textured white.

Finish: Highly durable oven cured no VOC premium powder coat.

Surge Protection: External surge protector provided as standard.

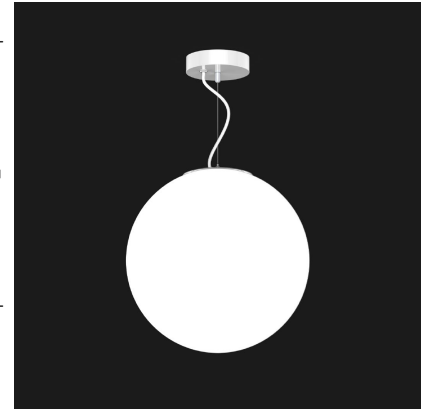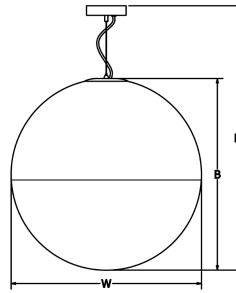

SAMPLE CATALOG NUMBER: GL-2801-				WD4-	1-	A
MODEL NO.				LAMPING	HANGER	OPTIONS
GL-2801	W in	24"	mm 610	WD4	1. Cable 	A. No Options LC. 150" Cord & Cable Supplied with 150" Cord & Cable. EL. Emergency Ballast Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
30lbs	B in	24"	mm 610			
13.5kg	H in	30"-90"	mm 760-2285			
Fixture Painted Textured White						
GL-2802	W in	30"	mm 760	WD4		
40lbs	B in	30"	mm 760			
18kg	H in	36"-96"	mm 915-2440			
Fixture Painted Textured White						

All Dimensions are nominal.

Light Source Definition

Fixture	Code	Total Wattage	Rated Life Hrs	Delivered Lumens
GL-2801	WD4	63	50000	4912
GL-2802	WD4	83	50000	6321

Universal Voltage unless otherwise specified.