

ILLUSION

Outdoor LED Sconce




9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs are field serviceable.
- LED Dimming:** 1% 0-10V dimming standard. Integral driver.
- Body:** Formed aluminum.
- Finish:** Highly durable oven cured no VOC premium powder coat.
Face plate painted textured white.
- Surge Protection:** External surge protector provided as standard.
- Listing:** Fixture ETL listed for wet locations.

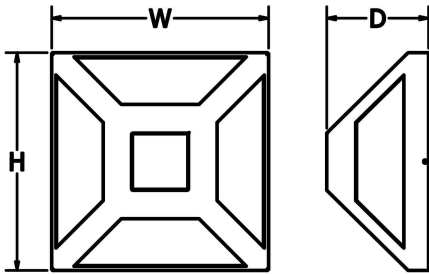

SAMPLE CATALOG NUMBER: GL-6550-		E5-	NSN
MODEL NO.		LAMPING	FINISH
GL-6550	W in 12" mm 305 H in 12" mm 305 12lbs 5.5kg D in 5 1/2" mm 140	E0. 13LED30 E5. 13LED35 E4. 13LED40 G0. 20LED30 G5. 20LED35 G4. 20LED40	Standard: Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBZ -Textured Bronze TST -Stone
GL-6555	W in 16" mm 405 H in 16" mm 405 15lbs 7kg D in 7" mm 180		

All dimensions are nominal.

Light Source Definition

Code	LED	CRI	Rated Life Hrs	Delivered Kelvin	Delivered Lumens
13LED30	13W LED	+80	50000	3000	1500
13LED35	13W LED	+80	50000	3500	1500
13LED40	13W LED	+80	50000	4000	1500
20LED30	20W LED	+80	50000	3000	2000
20LED35	20W LED	+80	50000	3500	2000
20LED40	20W LED	+80	50000	4000	2000

Universal Voltage unless otherwise specified.