

# LUX

## Exterior Sconce




9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@lighting.com www.lighting.com

### GENERAL SPECIFICATION

- LED:** High efficiency high-power LEDs. Universal 120-277V input voltage.
- LED Dimming:** Standard 1% 0-10V dimming.
- Body:** Cast aluminum.
- Diffuser:** UL-94 HB Flame Class rated.
- Standard Finishes:** Highly durable oven cured no VOC premium powder coat.
- Surge Protection:** External surge protector provided as standard.
- Mounting:** Driver mounted in 4" square by 2 1/8" deep junction box. Steel City #52171 or equivalent (supplied by others).
- Modified:** Contact factory for modified lumen packages.
- Listing:** Fixture ETL listed for wet locations.

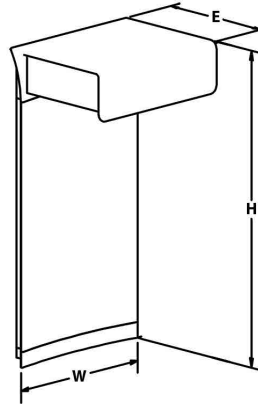

SAMPLE CATALOG NUMBER: GL-6615-		B-	R3-	PA-	A
MODEL NO.		LAMPING	OPTIC	FINISH	OPTION(S)
<b>GL-6615</b>	W in 5" mm 127 H in 6" mm 152 E in 4" mm 101 4lbs 1.8kg	A. 1LED30 B. 1LED35 C. 1LED40 D. 1LED30HO E. 1LED35HO F. 1LED40HO	R2. 20deg R3. 30deg R5. 50deg	Standard: Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze PG-Pine Green DO-Deep Orange PV-Purple Violet NB-Navy Blue  Textured Powder TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBZ-Textured Bronze TST-Stone	A. No Options EL. Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.
<b>GL-6616</b>	W in 5" mm 127 H in 12" mm 460 E in 4" mm 101 6lbs 2.7kg	A. 1LED30 B. 1LED35 C. 1LED40 D. 1LED30HO E. 1LED35HO F. 1LED40HO			
<b>GL-6617</b>	W in 5" mm 127 H in 18" mm 610 E in 4" mm 101 7lbs 3.2kg	A. 1LED30 B. 1LED35 C. 1LED40 D. 1LED30HO E. 1LED35HO F. 1LED40HO			
<b>GL-6618</b>	W in 5" mm 127 H in 24" mm 610 E in 4" mm 101 8lbs 3.6kg	A. 1LED30 B. 1LED35 C. 1LED40 D. 1LED30HO E. 1LED35HO F. 1LED40HO			
<b>GL-6619</b>	W in 5" mm 127 H in 36" mm 915 E in 4" mm 101 9lbs 4kg	A. 1LED30 B. 1LED35 C. 1LED40 D. 1LED30HO E. 1LED35HO F. 1LED40HO			

All dimensions are nominal.

### Light Source Definition

CODE	LED	Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
A	1LED30	13W	+80	50000	1270	3000
B	1LED35	13W	+80	50000	1270	3500
C	1LED40	13W	+80	50000	1270	4000
D	1LED30HO	19W	+80	50000	1814	3000
E	1LED35HO	19W	+80	50000	1814	3500
F	1LED40HO	19W	+80	50000	1814	4000

Universal Voltage unless otherwise specified.

