

# TUCSON

## Interior ADA Sconce





9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs.
- LED Dimming:** Integral 1% 0-10V dimming driver standard.
- Acrylic:** Acrylic is UL-94 HB Flame Class rated.
- Diffuser:** Standard perforated white top and bottom diffuser.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Custom:** Contact factory for custom lengths and lamping.
- Surge Protection:** External surge protector provided as standard.

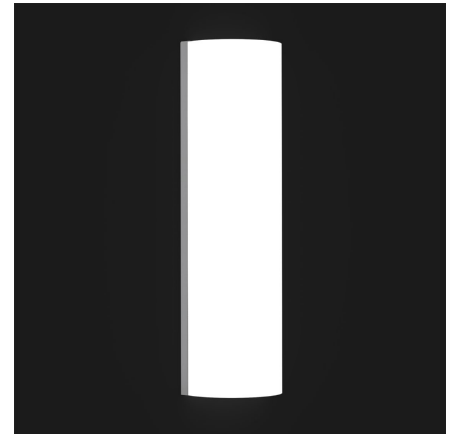

SAMPLE CATALOG NUMBER:					
GL-4634-		B5-	W-	NSN-	A
MODEL NO.	LAMPING	ACRYLIC	FINISH	OPTION(S)	
<b>GL-4634</b> W 5 3/4" in 145 mm H 13 1/4" in 335 mm 5lbs D 4" in 100 mm 2.3kg	<b>B0.</b> 1LED30 <b>B5.</b> 1LED35 <b>B4.</b> 1LED40	<b>Standard:</b> <b>W.</b> White Opal <b>Optional:</b> <b>S.</b> Satin White  Acrylic is UL-94 HB Flame Class rated.	<b>Standard:</b> Powder Coat <b>BLK-</b> Black <b>BL-</b> Blue <b>GR-</b> Gray <b>LG-</b> Light Gray <b>BE-</b> Beige <b>PAB-</b> Antique Brass <b>PA-</b> Painted Aluminum <b>PTC-</b> Painted Copper <b>WH-</b> White <b>DBZ-</b> Dark Bronze <b>NSN-</b> New Satin Nickel <b>BRN-</b> Brown <b>RD-</b> Red <b>CH-</b> Champagne <b>RG-</b> Reed Green <b>SG-</b> Sungold <b>GM-</b> Gun Metal <b>POR-</b> Oil Rubbed Bronze <b>PG-</b> Pine Green <b>DO-</b> Deep Orange <b>PV-</b> Purple Violet <b>NB-</b> Navy Blue  <b>Textured Powder</b> <b>TLV-</b> Light Verdigris <b>TWH-</b> Textured White <b>TBL-</b> Textured Black <b>TS-</b> Textured Silver <b>TBZ-</b> Textured Bronze <b>TST-</b> Stone	<b>A.</b> No Options <b>EL.</b> Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.	
<b>GL-4635</b> W 5 3/4" in 145 mm H 19" in 480 mm 6lbs D 4" in 100 mm 2.7kg	<b>B0.</b> 1LED30 <b>B5.</b> 1LED35 <b>B4.</b> 1LED40				
<b>GL-4636</b> W 5 3/4" in 145 mm H 24" in 610 mm 7lbs D 4" in 100 mm 3.2kg	<b>G0.</b> 2LED30 <b>G5.</b> 2LED35 <b>G4.</b> 2LED40				

All dimensions are nominal.

### Light Source Definition

Code	Total Wattage	CRI	Rated Life Hrs	Board Lumens	Kelvin
1LED30	14	+80	50000	1950	3000
1LED35	14	+80	50000	1950	3500
1LED40	14	+80	50000	1950	4000
2LED30	28	+80	50000	3900	3000
2LED35	28	+80	50000	3900	3500
2LED40	28	+80	50000	3900	4000

Universal Voltage unless otherwise specified.