ARTICLE

Schoolhouse Surface Mount

G Lighting
9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000
sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs are field serviceable.
LED Dimming: Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request.
Canopy: Canopy mounted on flat ceiling.
Body: 18ga steel or .050 aluminum glass fitter.
Glass: White opal diffuser hand blown in the USA.
Modifications: Consult factory for lamping or cluster options.
Finish: Highly durable oven cured no VOC premium powder coat.
Surge Protection: External surge protector provided as standard.

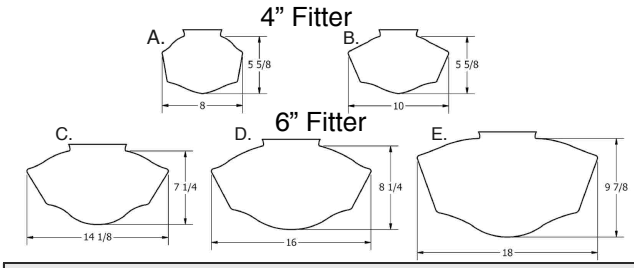



GL-3551 4" Fitter
GL-3553 6" Fitter

SAMPLE CATALOG NUMBER:
GL-3551- Y5- A- NSN- A

MODEL NO.	LAMPING	GLASS	FINISH	OPTION(S)
GL-3551	**IN1.** 1MED **Y0.** 11LED30 **Y5.** 11LED35 **Y4.** 11LED40	4" Fitter: **A.** 8" x 5 5/8" **B.** 10" x 5 5/8"	Standard: Powder Coat **BLK**-Black **BL**-Blue **GR**-Gray **LG**-Light Gray **BE**-Beige **PAB**-Antique Brass **PA**-Painted Aluminum **PTC**-Painted Copper **WH**-White **DBZ**-Dark Bronze **NSN**-New Satin Nickel **BRN**-Brown **RD**-Red **CH**-Champagne **RG**-Reed Green **SG**-Sungold **GM**-Gun Metal **POR**-Oil Rubbed Bronze **PG**-Pine Green **DO**-Deep Orange **PV**-Purple Violet **NB**-Navy Blue Textured Powder **TLV**-Light Verdigris **TWH**-Textured White **TBL**-Textured Black **TS**-Textured Silver **TBZ**-Textured Bronze **TST**-Stone	**A.** No Options **B.** Damp Location Available in powder coat or Satin Aluminum finish. **EL.** Emergency LED Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.
GL-3553	**IN1.** 1MED **Y0.** 11LED30 **Y5.** 11LED35 **Y4.** 11LED40 **W0.** 16LED30 **W5.** 16LED35 **W4.** 16LED40	6" Fitter: **C.** 14 1/8" x 7 1/4" **D.** 16" x 8 1/4" **E.** 18" x 9 7/8"		

All dimensions are nominal.

Light Source Definition

Code	Lamp	Type	Lamp Base
IN3, IN6	Med	A-19	Medium 120V

Code	LED	Total Wattage	Delivered Lumens	Kelvin
Y0	11LED30	11	1075	3000
Y5	11LED35	11	1075	3500
Y4	11LED40	11	1075	4000
W0	16LED30	16	1652	3000
W5	16LED35	16	1652	3500
W4	16LED40	16	1652	4000

Contact factory for availability of other lamp configurations.

Universal Voltage unless otherwise specified.

© Gross Chandelier Co.

G Lighting reserves the right to modify existing designs to improve appearance or function

G Lighting products are union made.