

BIRMINGHAM

Indoor Surface Mount



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs are field serviceable. Universal voltage.

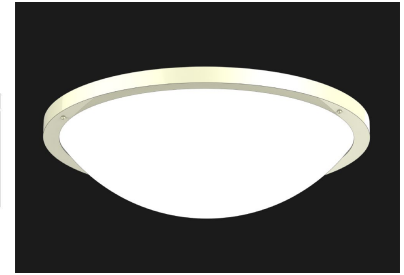

LED Dimming: Standard 1% 0-10V dimming with LED lamping option.



Body: GL-3020-3023 ring spun in 18ga steel or .050 aluminum.

Acrylic: Seamless acrylic is UL-94 HB Flame Class rated.

Finish: Highly durable oven cured no VOC premium powder coat.

Surge Protection: External surge protector provided as standard.



SAMPLE CATALOG NUMBER: GL-3022-		L45-	S-	PA-	A
MODEL NO.	LAMPING	ACRYLIC	FINISH	OPTION(S)	
GL-3020 14lbs B in 18" mm 460 6 kg W in 21" mm 535 D in 7" mm 180	IN3. 3MED L30. 3LED30 L35. 3LED35 L34. 3LED40	Standard: S. Satin White Optional: W. White Opal	Standard: Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze PG-Pine Green DO-Deep Orange PV-Purple Violet NB-Navy Blue Textured Powder TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBZ-Textured Bronze TST-Stone	A. No Options F1. Add Finial  F2. Add Finial  B. Damp Location Available in powder coat or Satin Aluminum finish. EL. Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage. Multi-circuiting available upon request.	
GL-3021 21lbs B in 24" mm 610 10 kg W in 27" mm 685 D in 8" mm 205	IN3. 3MED L40. 4LED30 L45. 4LED35 L44. 4LED40	Acrylic is UL-94 HB Flame Class rated.			
GL-3022 29lbs B in 30" mm 760 13kg W in 36" mm 920 D in 10" mm 255	IN6. 6MED L40. 4LED30 L45. 4LED35 L44. 4LED40 L60. 6LED30 L65. 6LED35 L64. 6LED40				
GL-3023 37lbs B in 38" mm 965 17kg W in 41" mm 1040 D in 10 1/2" mm 265 38" available in Satin Aluminum and powder coat finish only	IN6. 6MED L60. 6LED30 L65. 6LED35 L64. 6LED40 L80. 8LED30 L85. 8LED35 L84. 8LED40				

Fixtures over 50 lbs require reinforced junction box
All dimensions are nominal.

Lamp Definition

Code	Lamp	Type	Lamp Base	Code	Total Wattage	Kelvin	Delivered Lumens
IN3, IN6	Med	A-19	Medium 120V	L30	42	3000	4211
				L35	42	3500	4211
				L34	42	4000	4211
				L40	58	3000	5074
				L45	58	3500	5074
				L44	58	4000	5074
				L60	87	3000	8063
				L65	87	3500	8063
				L64	87	4000	8063
				L80	117	3000	12035
				L85	117	3500	12035
				L84	117	4000	12035

Contact factory for availability of other lamp configurations.

Universal Voltage unless otherwise specified.