

# CUBIX II - Acoustic

## Outer Acrylic Interior Surface Mount





9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs.
- Lower Output:** Lamping code ending with LO features lower lumen output.
- LED Dimming:** Standard 1% 0-10V dimming.
- Driver:** Max remote driver installation distance:  
White LED 25ft from fixture body and RGB 45ft from fixture body.
- RGB:** DMX controller supplied by others.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Mounting Plate:** Matches fixture finish.
- Surge Protection:** External surge protector provided as standard.

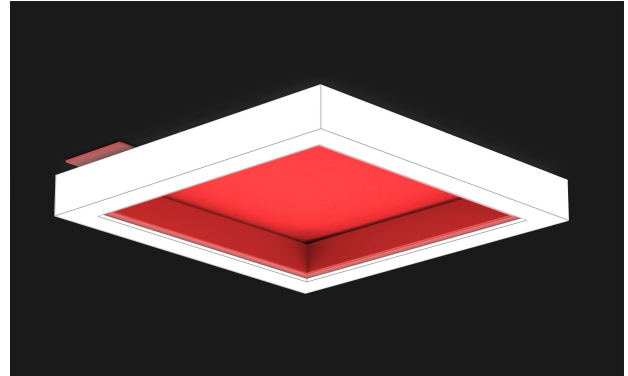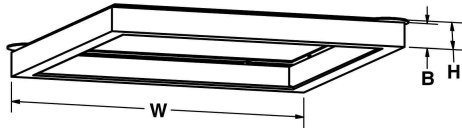

SAMPLE CATALOG NUMBER:					
GL-3832-	J-	BLK-	ABLK-	A	
MODEL NO.	LAMPING		FINISH	ACOUSTIC	OPTIONS
<b>GL-3830</b> W in 24"x24" 10lbs B in 3" 4.5kg H in 3.5"	<b>A.</b> 24LED30 <b>B.</b> 24LED35 <b>C.</b> 24LED40 <b>D.</b> RGB	<b>AL.</b> 24LED30LO <b>BL.</b> 24LED35LO <b>CL.</b> 24LED40LO	Standard: Powder Coat <b>BLK-</b> Black <b>BL-</b> Blue <b>GR-</b> Gray <b>LG-</b> Light Gray <b>BE-</b> Beige <b>PAB-</b> Antique Brass <b>PA-</b> Painted Aluminum <b>PTC-</b> Painted Copper <b>WH-</b> White <b>DBZ-</b> Dark Bronze <b>NSN-</b> New Satin Nickel <b>BRN-</b> Brown <b>RD-</b> Red <b>CH-</b> Champagne <b>RG-</b> Reed Green <b>SG-</b> Sungold <b>GM-</b> Gun Metal <b>POR-</b> Oil Rubbed Bronze <b>PG-</b> Pine Green <b>DO-</b> Deep Orange <b>PV-</b> Purple Violet <b>NB-</b> Navy Blue  Textured Powder <b>TLV-</b> Light Verdigris <b>TWH-</b> Textured White <b>TBL-</b> Textured Black <b>TS-</b> Textured Silver <b>TBZ-</b> Textured Bronze <b>TST-</b> Stone	Standard: Acoustic <b>ABLK-</b> Black <b>ABL-</b> Blue <b>AGR-</b> Gray <b>ALG-</b> Light Gray <b>ARD-</b> Red <b>AGN-</b> Green	<b>A.</b> No Options  <b>EL.</b> Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
<b>GL-3831</b> W in 36"x36" 15lbs B in 3" 6.8kg H in 3.5"	<b>E.</b> 36LED30 <b>F.</b> 36LED35 <b>G.</b> 36LED40 <b>H.</b> RGB	<b>EL.</b> 36LED30LO <b>FL.</b> 36LED35LO <b>GL.</b> 36LED40LO			
<b>GL-3832</b> W in 48"x48" 15lbs B in 3" 6.8kg H in 3.5"	<b>I.</b> 48LED30 <b>J.</b> 48LED35 <b>K.</b> 48LED40 <b>L.</b> RGB	<b>IL.</b> 48LED30LO <b>JL.</b> 48LED35LO <b>KL.</b> 48LED40LO			

All Dimensions are nominal.

### Light Source Definition

High Lumen Output						Low Lumen Output					
Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
24LED30/35/40	80	+85	50000	6802	3000/3500/4000	24LED30/35/40LO	43	+85	50000	3605*	3000/3500/4000
36LED30/35/40	112	+85	50000	10203*	3000/3500/4000	36LED30/35/40LO	56	+85	50000	5102*	3000/3500/4000
48LED30/35/40	160	+85	50000	13604*	3000/3500/4000	48LED30/35/40LO	85	+85	50000	7210*	3000/3500/4000
RGB	Contact Factory for Details										

\*Pending IES Testing

Universal Voltage unless otherwise specified.

