

# CUBIX - Acoustic

## Inner Acrylic Interior Pendant



9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

**LED:** High efficiency mid-power LEDs.

**Acoustic Panel:** 1/2" center acoustic panel reduces noise level in environment. GL-2728 and GL-2729 have a two-piece panel design and require an additional vertical cable hanger.

**Lower Output:** Lamping code ending with LO features lower lumen output.

**LED Dimming:** Standard 1% 0-10V dimming.



**Cable Hanger:** Standard 150" cable and white cord for on-site adjustability. Canopy painted textured white.

**Canopy:** Max remote driver installation distance: White LED 25ft from fixture body and RGB 45ft from fixture body. See Cubix Hanger Guide for more information.

**Finish:** Highly durable oven cured no VOC premium powder coat.

**RGB:** DMX controller supplied by others.

**Surge Protection:** External surge protector provided as standard.

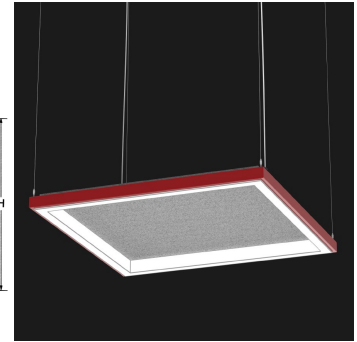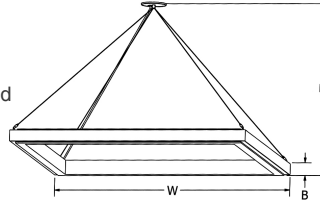

SAMPLE CATALOG NUMBER:						
GL-2826-	F-	BLK-	ABLK-	1-	A	
MODEL NO.	LAMPING		FINISH	ACOUSTIC	HANGER	OPTIONS
<b>GL-2825</b> 10lbs W in 24"x24" 4.5kg B in 3" H in 11"-145"	<b>A.</b> 24LED30 <b>B.</b> 24LED35 <b>C.</b> 24LED40 <b>D.</b> RGB	<b>AL.</b> 24LED30LO <b>BL.</b> 24LED35LO <b>CL.</b> 24LED40LO	<b>Standard:</b> Powder Coat <b>BLK-</b> Black <b>BL-</b> Blue <b>GR-</b> Gray <b>LG-</b> Light Gray <b>BE-</b> Beige <b>PAB-</b> Antique Brass <b>PA-</b> Painted Aluminum <b>PTC-</b> Painted Copper <b>WH-</b> White <b>DBZ-</b> Dark Bronze <b>NSN-</b> New Satin Nickel <b>BRN-</b> Brown <b>RD-</b> Red <b>CH-</b> Champagne <b>RG-</b> Reed Green <b>SG-</b> Sungold <b>GM-</b> Gun Metal <b>POR-</b> Oil Rubbed Bronze <b>PG-</b> Pine Green <b>DO-</b> Deep Orange <b>PV-</b> Purple Violet <b>NB-</b> Navy Blue	<b>Standard:</b> Acoustic <b>ABLK-</b> Black <b>ABL-</b> Blue <b>AGR-</b> Gray <b>ALG-</b> Light Gray <b>ARD-</b> Red <b>AGN-</b> Green	<b>1. Cable - Standard</b>  Drivers mounted remotely. See Cubix Hanger Guide for more information. <b>2. Oversized</b>  Drivers mounted inside oversized canopy. See Cubix Hanger Guide for more information. <b>3. Vertical Remote Canopy</b>  Drivers mounted remotely. See Cubix Hanger Guide for more information. <b>4. Vertical Integral Canopy</b>  Drivers mounted inside 12.5" oversized canopy. See Cubix Hanger Guide for more information. <b>Hanger options 1&amp;3 supplied with remote driver box.</b>	<b>A. No Options</b> <b>BC. Black Cord</b> Fixture supplied with black power cord. <b>EL. Emergency LED</b> Must be remotely mounted in a controlled environment with an area temperature range of 32"-131°F. Specify 120 or 277 voltage.
<b>GL-2826</b> 15lbs W in 36"x36" 6.8kg B in 3" H in 18.75"-145"	<b>E.</b> 36LED30 <b>F.</b> 36LED35 <b>G.</b> 36LED40 <b>H.</b> RGB	<b>EL.</b> 36LED30LO <b>FL.</b> 36LED35LO <b>GL.</b> 36LED40LO				
<b>GL-2827</b> 15lbs W in 48"x48" 6.8kg B in 3" H in 18.75"-145"	<b>I.</b> 48LED30 <b>J.</b> 48LED35 <b>K.</b> 48LED40 <b>L.</b> RGB	<b>IL.</b> 48LED30LO <b>JL.</b> 48LED35LO <b>KL.</b> 48LED40LO				
<b>GL-2828</b> 19lbs W in 60"x60" 10kg B in 3" H in 25.5"-142"	<b>M.</b> 60LED30 <b>N.</b> 60LED35 <b>O.</b> 60LED40 <b>P.</b> RGB	<b>ML.</b> 60LED30LO <b>NL.</b> 60LED35LO <b>OL.</b> 60LED40LO	<b>Textured Powder</b> <b>TLV-</b> Light Verdigris <b>TWH-</b> Textured White <b>TBL-</b> Textured Black <b>TS-</b> Textured Silver <b>TBZ-</b> Textured Bronze <b>TST-</b> Stone			
<b>GL-2829</b> 22lbs W in 72"x72" 10kg B in 3" H in 25.5"-142" <small>Fixture Built with Four Acrylic Segments</small>	<b>Q.</b> 72LED30 <b>R.</b> 72LED35 <b>S.</b> 72LED40 <b>T.</b> RGB	<b>QL.</b> 72LED30LO <b>RL.</b> 72LED35LO <b>SL.</b> 72LED40LO				

All Dimensions are nominal.

### Light Source Definition

High Lumen Output						Low Lumen Output					
Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
24LED30/35/40	77	+85	50000	6048	3000/3500/4000	24LED30/35/40LO	43	+85	50000	3207*	3000/3500/4000
36LED30/35/40	110	+85	50000	9439	3000/3500/4000	36LED30/35/40LO	56	+85	50000	4536*	3000/3500/4000
48LED30/35/40	156	+85	50000	13932	3000/3500/4000	48LED30/35/40LO	85	+85	50000	6410*	3000/3500/4000
60LED30/35/40	200	+85	50000	15119*	3000/3500/4000	60LED30/35/40LO	112	+85	50000	8466*	3000/3500/4000
72LED30/35/40	215	+85	50000	16956	3000/3500/4000	72LED30/35/40LO	134	+85	50000	9071*	3000/3500/4000
RGB	Contact Factory for Details										

Universal Voltage unless otherwise specified.

\*Pending IES Testing