

CUBIX - Acoustic

Inner Acrylic Interior Surface Mount




9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs.
- Lower Output:** Lamping code ending with LO features lower lumen output.
- LED Dimming:** Standard 1% 0-10V dimming.
- Driver:** Max remote driver installation distance:
White LED 25ft from fixture body and RGB 45ft from fixture body.
- RGB:** DMX controller supplied by others.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Mounting Plate:** Matches fixture finish.
- Surge Protection:** External surge protector provided as standard.

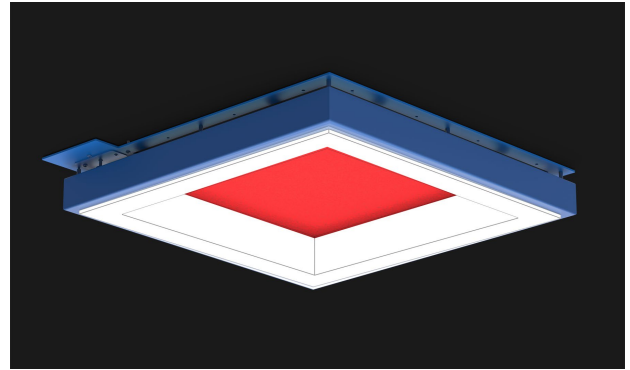

SAMPLE CATALOG NUMBER:				
GL-3826-	F-	BLK-	ABLK-	A
MODEL NO.	LAMPING	FINISH	ACOUSTIC	OPTIONS
GL-3825 W in 24"x24" 10lbs B in 3" 4.5kg H in 3.5"	A. 24LED30 AL. 24LED30LO B. 24LED35 BL. 24LED35LO C. 24LED40 CL. 24LED40LO D. RGB	Standard: Powder Coat BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze PG -Pine Green DO -Deep Orange PV -Purple Violet NB -Navy Blue Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBZ -Textured Bronze TST -Stone	Standard: Acoustic ABLK -Black ABL -Blue AGR -Gray ALG -Light Gray ARD -Red AGN -Green	A. No Options EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
GL-3826 W in 36"x36" 15lbs B in 3" 6.8kg H in 3.5"	E. 36LED30 EL. 36LED30LO F. 36LED35 FL. 36LED35LO G. 36LED40 GL. 36LED40LO H. RGB			
GL-3827 W in 48"x48" 15lbs B in 3" 6.8kg H in 3.5"	I. 48LED30 IL. 48LED30LO J. 48LED35 JL. 48LED35LO K. 48LED40 KL. 48LED40LO L. RGB			

All Dimensions are nominal.

Light Source Definition

High Lumen Output						Low Lumen Output				
Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens
24LED30/35/40	77	+85	50000	6048	3000/3500/4000	24LED30/35/40LO	43	+85	50000	3207*
36LED30/35/40	110	+85	50000	9439	3000/3500/4000	36LED30/35/40LO	56	+85	50000	4536*
48LED30/35/40	156	+85	50000	13932	3000/3500/4000	48LED30/35/40LO	85	+85	50000	6410*
RGB	Contact Factory for Details									

*Pending IES Testing

Universal Voltage unless otherwise specified.