

DELTA

Inner Acrylic Interior Pendant

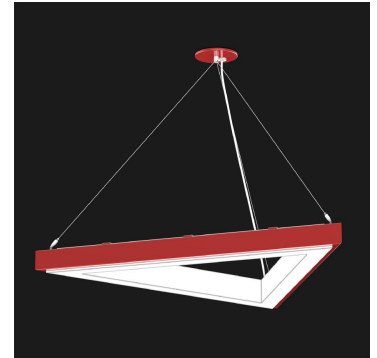
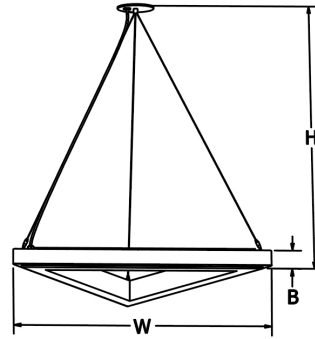






9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs are field serviceable.
- Lower Output:** Lamping code ending with LO features lower lumen output.
- LED Dimming:** Standard 1% 0-10V dimming.
- Driver:** Max remote driver installation distance: White LED 25ft from fixture body and RGB 45ft from fixture body.
- RGB:** DMX controller supplied by others.
- Acrylic:** Acrylic is UL-94 HB Flame Class rated.
- Cable Hanger:** Standard 150" cable and white cord for on-site adjustability.
- Canopy:** Matches fixture finish.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Surge Protection:** External surge protector provided as standard.



SAMPLE CATALOG NUMBER:		F-	BLK-	1-	A
GL-2786-					
MODEL NO.	LAMPING	FINISH	HANGER	OPTIONS	
GL-2785 W in 24" 10lbs B in 3" 4.5kg H in 11"-145"	A. 24LED30 AL. 24LED30LO B. 24LED35 BL. 24LED35LO C. 24LED40 CL. 24LED40LO D. RGB	Standard: Powder Coat BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze PG -Pine Green DO -Deep Orange PV -Purple Violet NB -Navy Blue	1. Cable - Standard  Driver mounted remotely	A. No Options BC. Black Cord Fixture supplied with black power cord. EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.	
GL-2786 W in 36" 12lbs B in 3" 5.4kg H in 18.75"-145"	E. 36LED30 EL. 36LED30LO F. 36LED35 FL. 36LED35LO G. 36LED40 GL. 36LED40LO H. RGB		2. Oversized  Drivers mounted inside 12.5" oversized canopy		
GL-2787 W in 48" 15lbs B in 3" 6.8kg H in 18.75"-145"	I. 48LED30 IL. 48LED30LO J. 48LED35 JL. 48LED35LO K. 48LED40 KL. 48LED40LO L. RGB		3. Vertical Remote Canopy  Drivers mounted remotely		
GL-2788 W in 60" 19lbs B in 3" 10kg H in 25.5"-142"	M. 60LED30 ML. 60LED30LO N. 60LED35 NL. 60LED35LO O. 60LED40 OL. 60LED40LO P. RGB		4. Vertical Integral Canopy  Drivers mounted inside 12.5" oversized canopy		

All Dimensions are nominal.

Light Source Definition

High Lumen Output						Low Lumen Output					
Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens*	Kelvin
24LED30/35/40	49	+85	50000	3385	3000/3500/4000	24LED30/35/40LO	27	+85	50000	1865	3000/3500/4000
36LED30/35/40	78	+85	50000	6150	3000/3500/4000	36LED30/35/40LO	43	+85	50000	3390	3000/3500/4000
48LED30/35/40	99	+85	50000	8227	3000/3500/4000	48LED30/35/40LO	54	+85	50000	4487	3000/3500/4000
60LED30/35/40	112	+85	50000	9860	3000/3500/4000	60LED30/35/40LO	62	+85	50000	5458	3000/3500/4000
RGB	Contact Factory for Details					Universal Voltage unless otherwise specified.					

*Estimate

