

# DISPATCH

## Schoolhouse Pendant







9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs are field serviceable.
- LED Dimming:** Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request.
- Canopy:** May be mounted on flat or sloped ceilings up to 40°.
- Body:** 18ga steel or .050 aluminum glass fitter.
- Glass:** White opal diffuser hand blown in the USA.
- Modifications:** Consult factory for lamping or cluster options.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Surge Protection:** External surge protector provided as standard.

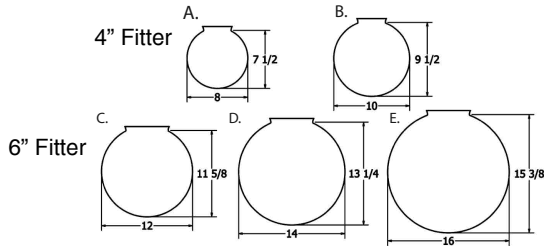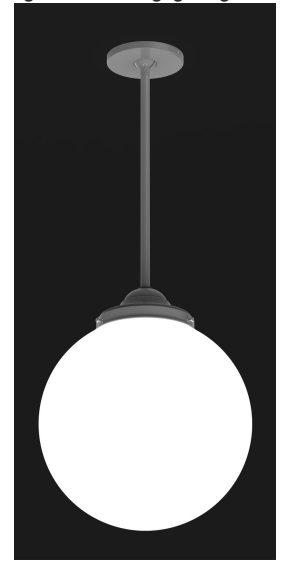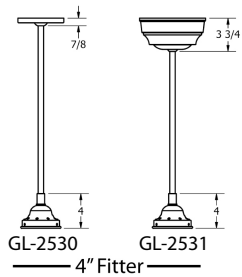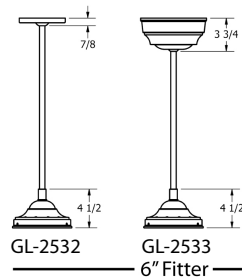

SAMPLE CATALOG NUMBER:					
GL-2531-	Y5-	A-	NSN-	A-	036
MODEL NO.	LAMPING	GLASS	FINISH	OPTION(S)	OVERALL HEIGHT
GL-2530	IN1.1MED	4" Fitter: A. 8" x 7 1/2" B. 10" x 9 1/2"	Standard: Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze PG-Pine Green DO-Deep Orange PV-Purple Violet NB-Navy Blue  Textured Powder TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBZ-Textured Bronze TST-Stone	A. No Options B. Damp Location Available in powder coat or Satin Aluminum finish. EL. Emergency LED Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.	Specify overall height in inches.
GL-2531	Y0. LED11 Y5. LED11 Y4. LED11				
GL-2532	IN1.1MED	6" Fitter: C. 12" x 11 5/8" D. 14" x 13 1/4" E. 16" x 15 3/8"			
GL-2533	Y0. LED11 Y5. LED11 Y4. LED11 W0. LED16 W5. LED16 W4. LED16				

All dimensions are nominal.

### Light Source Definition

Code	Lamp	Type	Lamp Base	Code	LED	Total Wattage	Delivered Lumens	Kelvin
IN1	Med	A-19	Medium 120V	Y0	LED11	11	1075	3000
				Y5	LED11	11	1075	3500
				Y4	LED11	11	1075	4000
				W0	LED16	16	1652	3000
				W5	LED16	16	1652	3500
				W4	LED16	16	1652	4000

Contact factory for availability of other lamp configurations.

Universal Voltage unless otherwise specified.