

# DISPATCH - High Output

## Schoolhouse Interior Surface Mount






9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

- LED:** High efficiency LEDs are field serviceable.
- Heatsink:** Only available in black anodized.
- LED Dimming:** Standard 0-10V dimming. TRIAC, DALI, or DMX available upon request.
- Body:** 18ga steel or .050 aluminum glass fitter.
- Glass:** White opal diffuser hand blown in the USA.
- Modifications:** Consult factory for lamping options.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Surge Protection:** External surge protector provided as standard.

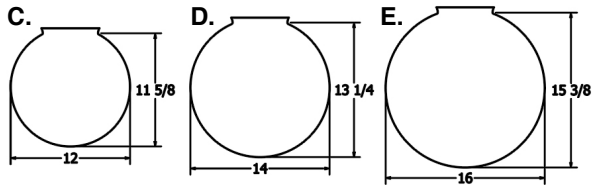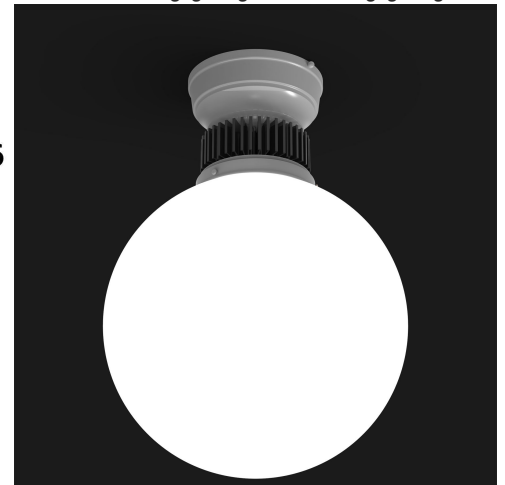

SAMPLE CATALOG NUMBER: GL-3565-				
MODEL NO.	AA5-	D-	NSN-	A-
MODEL NO.	LAMPING	GLASS	FINISH	OPTION(S)
<b>GL-3565</b> Driver mounted inside canopy	<b>AA0.</b> 1LED30L <b>AA5.</b> 1LED35L <b>AA4.</b> 1LED40L <b>BB0.</b> 1LED30M <b>BB5.</b> 1LED35M <b>BB4.</b> 1LED40M	6" Fitter: <b>C.</b> 12" x 11 5/8" <b>D.</b> 14" x 13 1/4" <b>E.</b> 16" x 15 3/8"	Standard: Powder Coat <b>BLK-</b> Black <b>BL-</b> Blue <b>GR-</b> Gray <b>LG-</b> Light Gray <b>BE-</b> Beige <b>PAB-</b> Antique Brass <b>PA-</b> Painted Aluminum <b>PTC-</b> Painted Copper <b>WH-</b> White <b>DBZ-</b> Dark Bronze <b>NSN-</b> New Satin Nickel <b>BRN-</b> Brown <b>RD-</b> Red <b>CH-</b> Champagne <b>RG-</b> Reed Green <b>SG-</b> Sungold <b>GM-</b> Gun Metal <b>POR-</b> Oil Rubbed Bronze <b>PG-</b> Pine Green <b>DO-</b> Deep Orange <b>PV-</b> Purple Violet <b>NB-</b> Navy Blue  Textured Powder <b>TLV-</b> Light Verdigris <b>TWH-</b> Textured White <b>TBL-</b> Textured Black <b>TS-</b> Textured Silver <b>TBZ-</b> Textured Bronze <b>TST-</b> Stone	<b>A.</b> No Options <b>B.</b> Damp Location Available in powder coat or Satin Aluminum finish. <b>EL.</b> Emergency LED Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage. <b>IEL.</b> Integral Emergency LED Integrally mounted emergency driver.

All dimensions are nominal.

### Light Source Definition

Code	LED	Total Wattage	Delivered Lumens	Kelvin	CRI
AA0	1LED30L	34	3520	3000	80
AA5	1LED35L	34	3520	3500	80
AA4	1LED40L	34	3520	4000	80
BB0	1LED30M	48	4567	3000	80
BB5	1LED35M	48	4567	3500	80
BB4	1LED40M	48	4567	4000	80

Universal Voltage unless otherwise specified.