

# ECLIPSE

## Indoor Surface Mount



9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

**LED:** High efficiency +90CRI mid-power LEDs are field serviceable.  
Universal voltage.

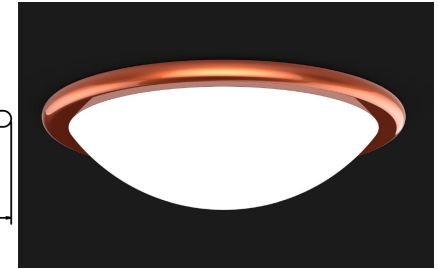
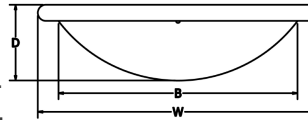
**LED Dimming:** Standard 1% 0-10V dimming with LED lamping option.



**Body:** GL-3160-3163 ring spun in 18ga steel or .050 aluminum.

**Acrylic:** Seamless acrylic is UL-94 HB Flame Class rated.

**Finish:** Highly durable oven cured no VOC premium powder coat.

**Surge Protection:** External surge protector provided as standard.



SAMPLE CATALOG NUMBER: GL-3162-		L45-	S-	NSN-	A
MODEL NO.	LAMPING	ACRYLIC	FINISH	OPTION(S)	
<b>GL-3160</b> 14lbs B in 18" mm 457 6 kg W in 23" mm 585 D in 7 1/2" mm 190	<b>IN3.3MED</b> <b>L30.3LED30</b> <b>L35.3LED35</b> <b>L34.3LED40</b>	<b>Standard:</b> <b>S. Satin White</b>  <b>Optional:</b> <b>W. White Opal</b>	<b>Standard:</b> <b>Powder Coat</b> <b>BLK-Black</b> <b>BL-Blue</b> <b>GR-Gray</b> <b>LG-Light Gray</b> <b>BE-Beige</b> <b>PAB-Antique Brass</b> <b>PA-Painted Aluminum</b> <b>PTC-Painted Copper</b> <b>WH-White</b> <b>DBZ-Dark Bronze</b> <b>NSN-New Satin Nickel</b> <b>BRN-Brown</b> <b>RD-Red</b> <b>CH-Champagne</b> <b>RG-Reed Green</b> <b>SG-Sungold</b> <b>GM-Gun Metal</b> <b>POR-Oil Rubbed Bronze</b> <b>PG-Pine Green</b> <b>DO-Deep Orange</b> <b>PV-Purple Violet</b> <b>NB-Navy Blue</b>  <b>Textured Powder</b> <b>TLV-Light Verdigris</b> <b>TWH-Textured White</b> <b>TBL-Textured Black</b> <b>TS-Textured Silver</b> <b>TBZ-Textured Bronze</b> <b>TST-Stone</b>	<b>A. No Options</b> <b>F1. Add Finial</b>  <b>F2. Add Finial</b>  <b>B. Damp Location</b> Available in powder coat or Satin Aluminum finish. <b>EL. Emergency LED</b> Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.  Multi-circuiting available upon request.	
<b>GL-3161</b> 21lbs B in 24" mm 610 10 kg W in 29" mm 735 D in 8 1/2" mm 215	<b>IN3.3MED</b> <b>L40.4LED30</b> <b>L45.4LED35</b> <b>L44.4LED40</b>	<b>Acrylic is UL-94 HB Flame Class rated.</b>			
<b>GL-3162</b> 29lbs B in 30" mm 762 13kg W in 35" mm 890 D in 9 1/2" mm 240	<b>IN6.6MED</b> <b>L40.4LED30</b> <b>L45.4LED35</b> <b>L44.4LED40</b> <b>L60.6LED30</b> <b>L65.6LED35</b> <b>L64.6LED40</b>				
<b>GL-3163</b> 37lbs B in 38" mm 965 17kg W in 43" mm 1090 D in 11" mm 280  38" available in Satin Aluminum and powder coat finish only	<b>IN6.6MED</b> <b>L60.6LED30</b> <b>L65.6LED35</b> <b>L64.6LED40</b> <b>L80.8LED30</b> <b>L85.8LED35</b> <b>L84.8LED40</b>				

Fixtures over 50 lbs require reinforced junction box  
All dimensions are nominal.

### Lamp Definition

Code	Lamp	Type	Lamp Base	Code	Total Wattage	Kelvin	Delivered Lumens	CRI
IN3, IN6	Med	A-19	Medium 120V	L30	39	3000	4211	+90
				L35	39	3500	4211	+90
				L34	39	4000	4211	+90
				L40	52	3000	5074	+90
				L45	52	3500	5074	+90
				L44	52	4000	5074	+90
				L60	78	3000	8063	+90
				L65	78	3500	8063	+90
				L64	78	4000	8063	+90
				L80	105	3000	12035	+90
				L85	105	3500	12035	+90
				L84	105	4000	12035	+90

Universal Voltage unless otherwise specified.  
Contact factory for availability of other lamp configurations.