

MERIDIAN

Interior Pendant



9777 Reavis Park Drive

St. Louis, MO 63123

800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency 90 CRI mid-power LEDs. Universal voltage.

Lower Output: Lamping code ending with LO features lower lumen output.

LED Dimming: Standard 1% 0-10V dimming. TRIAC, DALI, and DMX available upon request.

Acrylic: High diffusion and consistent light transmission.

Driver: Must be mounted within 25ft from fixture body.



Finish: Highly durable oven cured no VOC premium powder coat.

Canopy: Matches fixture finish.





Cable Hanger: Standard 150" cable and white cord for on-site adjustability.

Modifications: Consult factory for modified fixture sizes and lumen packages.

Surge Protection: External surge protector provided as standard.

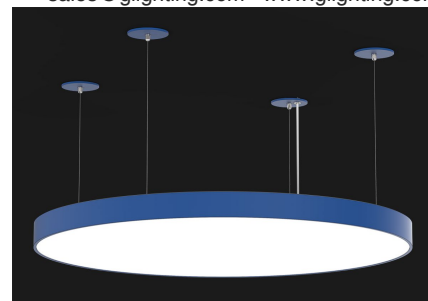

SAMPLE CATALOG NUMBER:

GL-2342-	B-	BLK-	1-	A
MODEL NO.	LAMPING	FINISH	HANGER	OPTIONS
GL-2339 W in 12" 5lbs B in 3" 3.2kg H in 11"-145" Available with hanger 1&2 only	A. LED30 B. LED35 C. LED40 D. LED30LO E. LED35LO F. LED40LO	Standard: Powder Coat BLK- Black BL- Blue GR- Gray LG- Light Gray BE- Beige PAB- Antique Brass PA- Painted Aluminum PTC- Painted Copper WH- White DBZ- Dark Bronze NSN- New Satin Nickel BRN- Brown RD- Red CH- Champagne RG- Reed Green SG- Sungold GM- Gun Metal POR- Oil Rubbed Bronze PG- Pine Green DO- Deep Orange PV- Purple Violet NB- Navy Blue	1. Cable - Standard  Drivers mounted remotely. 2. Oversized  Drivers mounted inside oversized canopy. 3. Vertical Canopy  Drivers mounted remotely. 4. Vertical Integral Canopy  Drivers mounted inside oversized canopy. Hanger options 1&3 supplied with remote driver box. GL-2339 available with hanger 1&2 only.	A. No Options BC. Black Cord Fixture supplied with black power cord. EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
GL-2340 W in 18" 7lbs B in 3" 3.2kg H in 11"-145"				
GL-2341 W in 24" 10lbs B in 3" 4.5kg H in 18.75"-145"				
GL-2342 W in 30" 14lbs B in 3" 6.3kg H in 18.75"-145"				
GL-2343 W in 36" 18lbs B in 3" 8.2kg H in 18.75"-145"		Textured Powder TLV- Light Verdigris TWH- Textured White TBL- Textured Black TS- Textured Silver TBT- Textured Bronze TST- Stone		
GL-2344 W in 48" 20lbs B in 3" 9.1kg H in 18.75"-145"				

All Dimensions are nominal.

Light Source Definition

High Lumen Output						Low Lumen Output					
Fixture	Total Wattage	Rated CRI	Life Hrs	Delivered Lumens	Kelvin	Code	Total Wattage	Rated CRI	Life Hrs	Delivered Lumens	Kelvin
GL-2339	13	+90	50000	1073	3000/3500/4000	GL-2339	8	+90	50000	644	3000/3500/4000
GL-2340	26	+90	50000	2202	3000/3500/4000	GL-2340	16	+90	50000	1321	3000/3500/4000
GL-2341	43	+90	50000	3540	3000/3500/4000	GL-2341	29	+90	50000	2124	3000/3500/4000
GL-2342	77	+90	50000	6407	3000/3500/4000	GL-2342	46	+90	50000	3844	3000/3500/4000
GL-2343	110	+90	50000	9132	3000/3500/4000	GL-2343	66	+90	50000	5479	3000/3500/4000
GL-2344	197	+90	50000	16282	3000/3500/4000	GL-2344	118	+90	50000	9769	3000/3500/4000

Universal Voltage unless otherwise specified.