

ORBIS II

Outer Acrylic Interior Pendant



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs.

Lower Output: Lamping code ending with LO features lower lumen output.

LED Dimming: Standard 1% 0-10V dimming.

Driver: Max remote driver installation distance:

White LED 25ft from fixture body and RGB 45ft from fixture body.

See Orbis Hanger Guide for more information.

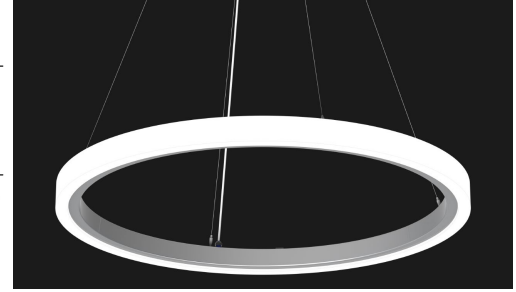
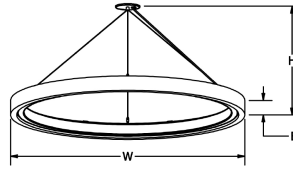
RGB: DMX controller supplied by others.





Finish: Highly durable oven cured no VOC premium powder coat.

Canopy: Matches fixture finish.

Cable Hanger: Standard 150" cable and white cord for on-site adjustability.

Surge Protection: External surge protector provided as standard.



SAMPLE CATALOG NUMBER:						
GL-2726-		F-	BLK-	1-	A	
MODEL NO.		LAMPING		FINISH	HANGER	OPTIONS
GL-2725	W in 24" 10lbs B in 3" 4.5kg H in 11"-145"	A. 24LED30 B. 24LED35 C. 24LED40 D. RGB	AL. 24LED30LO BL. 24LED35LO CL. 24LED40LO	Standard: Powder Coat BLK- Black BL- Blue GR- Gray LG- Light Gray BE- Beige PAB- Antique Brass PA- Painted Aluminum PTC- Painted Copper WH- White DBZ- Dark Bronze NSN- New Satin Nickel BRN- Brown RD- Red CH- Champagne RG- Reed Green SG- Sungold GM- Gun Metal POR- Oil Rubbed Bronze PG- Pine Green DO- Deep Orange PV- Purple Violet NB- Navy Blue	1. Cable - Standard  Drivers mounted remotely. See Orbis Hanger Guide for more information.	A. No Options BC. Black Cord Fixture supplied with black power cord. EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
GL-2738	W in 36" 12lbs B in 3" 5.4kg H in 18.75"-145"	U. 36LED30 V. 36LED35 W. 36LED40 X. RGB	UL. 36LED30LO VL. 36LED35LO WL. 36LED40LO	Textured Powder TLV- Light Verdigris TWH- Textured White TBL- Textured Black TS- Textured Silver TBZ- Textured Bronze TST- Stone	2. Oversized  Drivers mounted inside oversized canopy. See Orbis Hanger Guide for more information.	
GL-2726	W in 48" 15lbs B in 3" 6.8kg H in 18.75"-145"	E. 48LED30 F. 48LED35 G. 48LED40 H. RGB	EL. 48LED30LO FL. 48LED35LO GL. 48LED40LO		3. Vertical Remote Canopy  Drivers mounted remotely. See Orbis Hanger Guide for more information.	
GL-2739	W in 60" 18lbs B in 3" 8.2kg H in 18.75"-145"	Y. 60LED30 Z. 60LED35 AA. 60LED40 BB. RGB	YL. 60LED30LO ZL. 60LED35LO AAL. 60LED40LO		4. Vertical Integral Canopy  Drivers mounted inside 12.5" oversized canopy. See Orbis Hanger Guide for more information.	
GL-2727	W in 72" 22lbs B in 3" 10kg H in 25.5"-142" Fixture Built with Four Acrylic Segments	I. 72LED30 J. 72LED35 K. 72LED40 L. RGB	IL. 72LED30LO JL. 72LED35LO KL. 72LED40LO		Hanger options 1&3 supplied with remote driver box.	
GL-2728	W in 96" 35lbs B in 3" 15.9kg H in 30.75"-139" Fixture Body Built in Four Segments and Eight Acrylic Segments.	M. 96LED30 N. 96LED35 O. 96LED40 P. RGB	ML. 96LED30LO NL. 96LED35LO OL. 96LED40LO			
GL-2729	W in 120" 50lbs B in 3" 22.7kg H in 39"-133" Fixture Body Built in Three Segments and Eight Acrylic Segments	Q. 120LED30 R. 120LED35 S. 120LED40 T. RGB	QL. 120LED30LO RL. 120LED35LO SL. 120LED40LO			

All Dimensions are nominal.

Light Source Definition

High Lumen Output						Low Lumen Output					
Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens*	Kelvin
24LED30/35/40	56	+80	50000	5141	3000/3500/4000	24LED30LO/35LO/40LO	34	+80	50000	3085	3000/3500/4000
36LED30/35/40	76	+80	50000	7480	3000/3500/4000	36LED30LO/35LO/40LO	46	+80	50000	4488	3000/3500/4000
48LED30/35/40	108	+80	50000	10197	3000/3500/4000	48LED30LO/35LO/40LO	65	+80	50000	6118	3000/3500/4000
60LED30/35/40	129	+80	50000	12021	3000/3500/4000	60LED30LO/35LO/40LO	73	+80	50000	6975	3000/3500/4000
72LED30/35/40	154	+80	50000	15345	3000/3500/4000	72LED30LO/35LO/40LO	92	+80	50000	9207	3000/3500/4000
96LED30/35/40	215	+80	50000	20096	3000/3500/4000	96LED30LO/35LO/40LO	139	+80	50000	12956	3000/3500/4000
120LED30/35/40	285	+80	50000	26746	3000/3500/4000	120LED30LO/35LO/40LO	155	+80	50000	14581	3000/3500/4000
RGB	Contact Factory for Details					Universal Voltage unless otherwise specified.					