

ORBIS II - Acoustic

Outer Acrylic Interior Pendant



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs.

Acoustic Panel: 1/2" center acoustic panel reduces noise level in environment. GL-2798 and GL-2799 have a two-piece panel design and require an additional vertical cable hanger.

Lower Output: Lamping code ending with LO features lower lumen output.

LED Dimming: Standard 1% 0-10V dimming.



Cable Hanger: Standard 150" cable and white cord for on-site adjustability. Canopy painted textured white.

Canopy: Max remote driver installation distance: White LED 25ft from fixture body and RGB 45ft from fixture body. See Orbis Hanger Guide for more information.

Finish: Highly durable oven cured no VOC premium powder coat.

RGB: DMX controller supplied by others.

Surge Protection: External surge protector provided as standard.

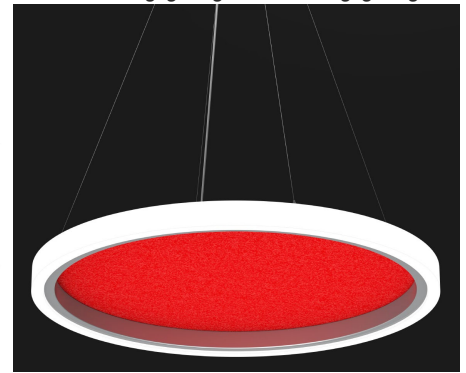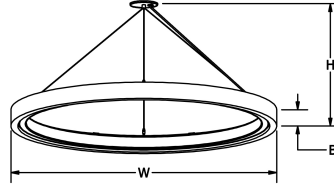

SAMPLE CATALOG NUMBER:						
GL-2797-		F-	BLK-	ABLK-	1-	A
MODEL NO.	LAMPING		FINISH	ACOUSTIC	HANGER	OPTIONS
GL-2795 10lbs W 24" 4.5kg B 3" H 11"-145"	A. 24LED30 B. 24LED35 C. 24LED40 D. RGB	AL. 24LED30LO BL. 24LED35LO CL. 24LED40LO	Standard: Powder Coat BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze PG -Pine Green DO -Deep Orange PV -Purple Violet NB -Navy Blue	Standard: Acoustic ABLK -Black ABL -Blue AGR -Gray ALG -Light Gray ARD -Red AGN -Green	1. Cable - Standard Drivers mounted remotely. See Orbis Hanger Guide for more information.	A. No Options BC. Black Cord Fixture supplied with black power cord. EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
GL-2796 12lbs W 36" 5.4kg B 3" H 18.75"-145"	U. 36LED30 V. 36LED35 W. 36LED40 X. RGB	UL. 36LED30LO VL. 36LED35LO WL. 36LED40LO	Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBZ -Textured Bronze TST -Stone	Seamless Acoustic in 24" thru 48" sizes. Seam in 60" & 72".	2. Oversized Drivers mounted inside oversized canopy. See Orbis Hanger Guide for more information.	
GL-2797 15lbs W 48" 6.8kg B 3" H 18.75"-145"	E. 48LED30 F. 48LED35 G. 48LED40 H. RGB	EL. 48LED30LO FL. 48LED35LO GL. 48LED40LO			3. Vertical Remote Canopy Drivers mounted remotely. See Orbis Hanger Guide for more information.	
GL-2798 18lbs W 60" 8.2kg B 3" H 18.75"-145"	Y. 60LED30 Z. 60LED35 AA. 60LED40 BB. RGB	YL. 60LED30LO ZL. 60LED35LO AAL. 60LED40LO			4. Vertical Integral Canopy Drivers mounted inside 12.5" oversized canopy. See Orbis Hanger Guide for more information. Hanger options 1&3 supplied with remote driver box.	
GL-2799 22lbs W 72" 10kg B 3" H 25.5"-142" Fixture Built with Four Acrylic Segments	I. 72LED30 J. 72LED35 K. 72LED40 L. RGB	IL. 72LED30LO JL. 72LED35LO KL. 72LED40LO				

All Dimensions are nominal.

Light Source Definition

High Lumen Output						Low Lumen Output					
Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens*	Kelvin
24LED30/35/40	56	+80	50000	5141	3000/3500/4000	24LED30LO/35LO/40LO	34	+80	50000	3085	3000/3500/4000
36LED30/35/40	76	+80	50000	7480	3000/3500/4000	36LED30LO/35LO/40LO	46	+80	50000	4488	3000/3500/4000
48LED30/35/40	108	+80	50000	10197	3000/3500/4000	48LED30LO/35LO/40LO	65	+80	50000	6118	3000/3500/4000
60LED30/35/40	130	+80	50000	12950	3000/3500/4000	60LED30LO/35LO/40LO	73	+80	50000	6975	3000/3500/4000
72LED30/35/40	154	+80	50000	15345	3000/3500/4000	72LED30LO/35LO/40LO	92	+80	50000	9207	3000/3500/4000
RGB	Contact Factory for Details										

*Estimate
Universal Voltage unless otherwise specified.