

# ORBIS

## Inner Acrylic Interior Pendant





9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@lighting.com www.lighting.com

### GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs.
- Lower Output:** Lamping code ending with LO features lower lumen output.
- LED Dimming:** Standard 1% 0-10V dimming.
- Driver:** Max remote driver installation distance: White LED 25ft from fixture body and RGB 45ft from fixture body. See Orbis Hanger Guide for more information.
- RGB:** DMX controller supplied by others.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Canopy:** Matches fixture finish.
- Cable Hanger:** Standard 150" cable and white cord for on-site adjustability.
- Surge Protection:** External surge protector provided as standard.

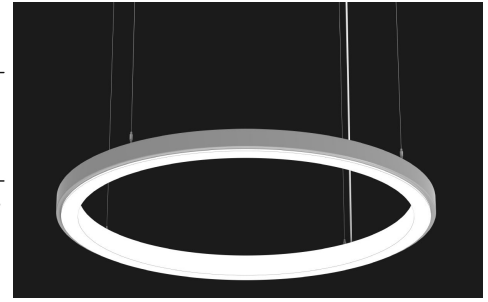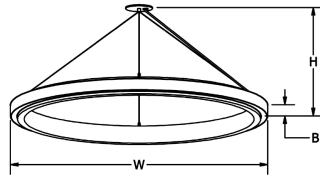

SAMPLE CATALOG NUMBER:		F-	BLK-	1-	A
GL-2721-					
MODEL NO.	LAMPING	FINISH	HANGER	OPTIONS	
<b>GL-2720</b> W in 24" 10lbs B in 3" 4.5kg H in 11"-145"	<b>A.</b> 24LED30 <b>B.</b> 24LED35 <b>C.</b> 24LED40 <b>D.</b> RGB	<b>AL.</b> 24LED30LO <b>BL.</b> 24LED35LO <b>CL.</b> 24LED40LO	<b>Standard:</b> Powder Coat <b>BLK-</b> Black <b>BL-</b> Blue <b>GR-</b> Gray <b>LG-</b> Light Gray <b>BE-</b> Beige <b>PAB-</b> Antique Brass <b>PA-</b> Painted Aluminum <b>PTC-</b> Painted Copper <b>WH-</b> White <b>DBZ-</b> Dark Bronze <b>NSN-</b> New Satin Nickel <b>BRN-</b> Brown <b>RD-</b> Red <b>CH-</b> Champagne <b>RG-</b> Road Green <b>SG-</b> Sungold <b>GM-</b> Gun Metal <b>POR-</b> Oil Rubbed Bronze <b>PG-</b> Pine Green <b>DO-</b> Deep Orange <b>PV-</b> Purple Violet <b>NB-</b> Navy Blue	<b>1. Cable - Standard</b>  Drivers mounted remotely. See Orbis Hanger Guide for more information.	<b>A. No Options</b> <b>BC. Black Cord</b> Fixture supplied with black power cord. <b>EL. Emergency LED</b> Must be remotely mounted in a controlled environment with an area temperature range of 32"-131°F. Specify 120 or 277 voltage.
<b>GL-2736</b> W in 36" 15lbs B in 3" 6.8kg H in 18.75"-145"	<b>U.</b> 36LED30 <b>V.</b> 36LED35 <b>W.</b> 36LED40 <b>X.</b> RGB	<b>UL.</b> 36LED30LO <b>VL.</b> 36LED35LO <b>WL.</b> 36LED40LO	<b>3. Vertical Remote Canopy</b>  Drivers mounted inside oversized canopy. See Orbis Hanger Guide for more information.		
<b>GL-2721</b> W in 48" 15lbs B in 3" 6.8kg H in 18.75"-145"	<b>E.</b> 48LED30 <b>F.</b> 48LED35 <b>G.</b> 48LED40 <b>H.</b> RGB	<b>EL.</b> 48LED30LO <b>FL.</b> 48LED35LO <b>GL.</b> 48LED40LO	<b>4. Vertical Integral Canopy</b>  Drivers mounted inside 12.5" oversized canopy. See Orbis Hanger Guide for more information.		
<b>GL-2737</b> W in 60" 18lbs B in 3" 8.2kg H in 18.75"-145"	<b>Y.</b> 60LED30 <b>Z.</b> 60LED35 <b>AA.</b> 60LED40 <b>BB.</b> RGB	<b>YL.</b> 60LED30LO <b>ZL.</b> 60LED35LO <b>AAL.</b> 60LED40LO	<b>2. Oversized</b>  Drivers mounted inside oversized canopy. See Orbis Hanger Guide for more information.		
<b>GL-2722</b> W in 72" 22lbs B in 3" 10kg H in 25.5"-142" Fixture Built with Four Acrylic Segments	<b>I.</b> 72LED30 <b>J.</b> 72LED35 <b>K.</b> 72LED40 <b>L.</b> RGB	<b>IL.</b> 72LED30LO <b>JL.</b> 72LED35LO <b>KL.</b> 72LED40LO	<b>Textured Powder</b> <b>TLV-</b> Light Verdigris <b>TWH-</b> Textured White <b>TBL-</b> Textured Black <b>TS-</b> Textured Silver <b>TBZ-</b> Textured Bronze <b>TST-</b> Stone		
<b>GL-2723</b> W in 96" 35lbs B in 3" 15.9kg H in 30.75"-139" Fixture Body Built in Four Segments and Eight Acrylic Segments.	<b>M.</b> 96LED30 <b>N.</b> 96LED35 <b>O.</b> 96LED40 <b>P.</b> RGB	<b>ML.</b> 96LED30LO <b>NL.</b> 96LED35LO <b>OL.</b> 96LED40LO			
<b>GL-2724</b> W in 120" 50lbs B in 3" 22.7kg H in 39"-133" Fixture Body Built in Three Segments and Eight Acrylic Segments	<b>Q.</b> 120LED30 <b>R.</b> 120LED35 <b>S.</b> 120LED40 <b>T.</b> RGB	<b>QL.</b> 120LED30LO <b>RL.</b> 120LED35LO <b>SL.</b> 120LED40LO			

All Dimensions are nominal.

### Light Source Definition

High Lumen Output						Low Lumen Output						
Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens*	Kelvin	
24LED30/35/40	54	+80	50000	4917	3000/3500/4000	24LED30LO/35LO/40LO	32	+80	50000	2481	3000/3500/4000	
36LED30/35/40	76	+80	50000	7261	3000/3500/4000	36LED30LO/35LO/40LO	46	+80	50000	4357	3000/3500/4000	
48LED30/35/40	106	+80	50000	10096	3000/3500/4000	48LED30LO/35LO/40LO	64	+80	50000	6058	3000/3500/4000	
60LED30/35/40	131	+80	50000	12991	3000/3500/4000	60LED30LO/35LO/40LO	73	+80	50000	7143	3000/3500/4000	
72LED30/35/40	152	+80	50000	14838	3000/3500/4000	72LED30LO/35LO/40LO	104	+80	50000	10159	3000/3500/4000	
96LED30/35/40	218	+80	50000	20604	3000/3500/4000	96LED30LO/35LO/40LO	131	+80	50000	12362	3000/3500/4000	
120LED30/35/40	285	+80	50000	26372	3000/3500/4000	120LED30LO/35LO/40LO	146	+80	50000	13797	3000/3500/4000	
RGB	Contact Factory for Details						Universal Voltage unless otherwise specified.					*Estimate