

# ORBIS

## Inner Acrylic Interior Surface Mount





9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs.
- Lower Output:** Lamping code ending with LO features lower lumen output.
- LED Dimming:** Standard 1% 0-10V dimming.
- Driver:** Max remote driver installation distance: White LED 25ft from fixture body and RGB 45ft from fixture body.
- RGB:** DMX controller supplied by others.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Mounting Plate:** Matches fixture finish.
- Surge Protection:** External surge protector provided as standard.

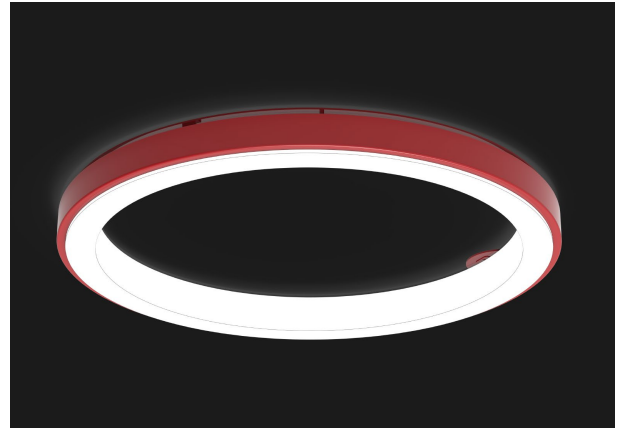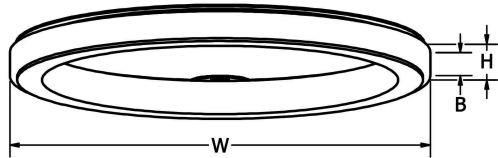

| SAMPLE CATALOG NUMBER:<br>GL-3721-  |  | F-  | BLK-  | A   |
|---|--|---|---|---|
| MODEL NO.   | LAMPING  | FINISH  | OPTIONS   |   |
| <b>GL-3720</b> W 24"<br>10lbs B 3"<br>4.5kg H 3.5"  | <b>A.</b> 24LED30<br><b>B.</b> 24LED35<br><b>C.</b> 24LED40<br><b>D.</b> RGB   | <b>AL.</b> 24LED30LO<br><b>BL.</b> 24LED35LO<br><b>CL.</b> 24LED40LO  | <b>Standard:</b><br>Powder Coat<br><b>BLK</b> -Black<br><b>BL</b> -Blue<br><b>GR</b> -Gray<br><b>LG</b> -Light Gray<br><b>BE</b> -Beige<br><b>PAB</b> -Antique Brass<br><b>PA</b> -Painted Aluminum<br><b>PTC</b> -Painted Copper<br><b>WH</b> -White<br><b>DBZ</b> -Dark Bronze<br><b>NSN</b> -New Satin Nickel<br><b>BRN</b> -Brown<br><b>RD</b> -Red<br><b>CH</b> -Champagne<br><b>RG</b> -Reed Green<br><b>SG</b> -Sungold<br><b>GM</b> -Gun Metal<br><b>POR</b> -Oil Rubbed Bronze<br><b>PG</b> -Pine Green<br><b>DO</b> -Deep Orange<br><b>PV</b> -Purple Violet<br><b>NB</b> -Navy Blue<br><br><b>Textured Powder</b><br><b>TLV</b> -Light Verdigris<br><b>TWH</b> -Textured White<br><b>TBL</b> -Textured Black<br><b>TS</b> -Textured Silver<br><b>TBZ</b> -Textured Bronze<br><b>TST</b> -Stone | <b>A.</b> No Options<br><br><b>EL.</b> Emergency LED<br>Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage. |
| <b>GL-3736</b> W 36"<br>15lbs B 3"<br>6.8kg H 3.5"  | <b>U.</b> 36LED30<br><b>V.</b> 36LED35<br><b>W.</b> 36LED40<br><b>X.</b> RGB   | <b>UL.</b> 36LED30LO<br><b>VL.</b> 36LED35LO<br><b>WL.</b> 36LED40LO  |   |   |
| <b>GL-3721</b> W 48"<br>15lbs B 3"<br>6.8kg H 3.5"  | <b>E.</b> 48LED30<br><b>F.</b> 48LED35<br><b>G.</b> 48LED40<br><b>H.</b> RGB   | <b>EL.</b> 48LED30LO<br><b>FL.</b> 48LED35LO<br><b>GL.</b> 48LED40LO  |   |   |
| <b>GL-3737</b> W 60"<br>18lbs B 3"<br>8.2kg H 3.5"  | <b>Y.</b> 60LED30<br><b>Z.</b> 60LED35<br><b>AA.</b> 60LED40<br><b>BB.</b> RGB | <b>YL.</b> 60LED30LO<br><b>ZL.</b> 60LED35LO<br><b>AAL.</b> 60LED40LO |   |   |
| <b>GL-3722</b> W 72"<br>22lbs B 3"<br>10kg H 3.5"<br><br>Fixture Built with Four Acrylic Segments | <b>I.</b> 72LED30<br><b>J.</b> 72LED35<br><b>K.</b> 72LED40<br><b>L.</b> RGB   | <b>IL.</b> 72LED30LO<br><b>JL.</b> 72LED35LO<br><b>KL.</b> 72LED40LO  |   |   |

All Dimensions are nominal.

### Light Source Definition

| High Lumen Output |                             |     |                |                  |                | Low Lumen Output    |               |     |                |                   |                |
|-------------------|-----------------------------|-----|----------------|------------------|----------------|---------------------|---------------|-----|----------------|-------------------|----------------|
| Code              | Total Wattage               | CRI | Rated Life Hrs | Delivered Lumens | Kelvin         | Code                | Total Wattage | CRI | Rated Life Hrs | Delivered Lumens* | Kelvin         |
| 24LED30/35/40     | 54                          | +80 | 50000          | 4135             | 3000/3500/4000 | 24LED30LO/35LO/40LO | 32            | +80 | 50000          | 2481              | 3000/3500/4000 |
| 36LED30/35/40     | 76                          | +80 | 50000          | 7261             | 3000/3500/4000 | 36LED30LO/35LO/40LO | 46            | +80 | 50000          | 4357              | 3000/3500/4000 |
| 48LED30/35/40     | 106                         | +80 | 50000          | 10096            | 3000/3500/4000 | 48LED30LO/35LO/40LO | 64            | +80 | 50000          | 6058              | 3000/3500/4000 |
| 60LED30/35/40     | 131                         | +80 | 50000          | 12991            | 3000/3500/4000 | 60LED30LO/35LO/40LO | 73            | +80 | 50000          | 7143              | 3000/3500/4000 |
| 72LED30/35/40     | 152                         | +80 | 50000          | 14838            | 3000/3500/4000 | 72LED30LO/35LO/40LO | 104           | +80 | 50000          | 10159             | 3000/3500/4000 |
| RGB               | Contact Factory for Details |     |                |                  |                |                     |               |     |                |                   |                |

Universal Voltage unless otherwise specified. \*Estimate

