

PHOENIX - Up & Down Light

Interior LED Pendant



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: Lumen maintenance +90% over 50,000 hour life.
Light source is field replaceable.

LED Dimming: Standard 1% 0-10V dimming.

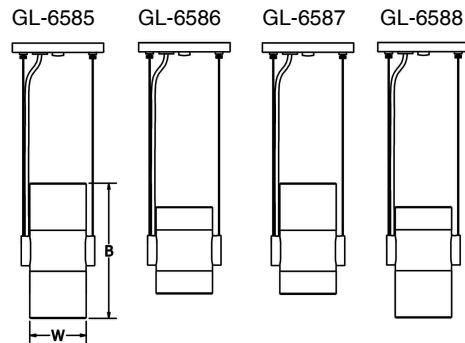
Driver: Max remote driver installation distance: 25ft from fixture body.



Finish: Highly durable oven cured no VOC premium powder coat.

Body: Cast aluminum.

Canopy: Matches fixture finish. Supplied with standard 72" white cord and cable. Field adjustable.

Surge Protection: External surge protector provided as standard.



SAMPLE CATALOG NUMBER:							
GL-6585-	J-	G-	R2-	R5-	TBL-	1-	A-
MODEL NO.	LAMPING DOWN	LAMPING UP	REFLECTOR DOWN	REFLECTOR UP	FINISH	HANGER	OPTIONS
GL-6585 2 lbs B 9.125" in 1 kg W 4" in	F. LED30 G. LED35 H. LED40 I. LED30HO* J. LED35HO* K. LED40HO*	F. LED30 G. LED35 H. LED40	Down R2 20° Fresnel Lens R3 30° Flat, Clear Lens	Up R2 20° Fresnel Lens R3 30° Flat, Clear Lens	Standard: Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze PG-Pine Green DO-Deep Orange PV-Purple Violet NB-Navy Blue Textured Powder TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBZ-Textured Bronze TST-Stone	1. Cord and Cable Remote Driver  Drivers mounted remotely	A. No Options EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. 2C. Two Circuit Fixture wired with two circuits. Standard with HO lamping options. BC. Black Cord Fixture supplied with black power cord. LC. 150" Cord & Cable Fixture supplied with 150" of cable and standard white cord or optional black cord.
GL-6586 2 lbs B 6" in 1 kg W 4" in	F. LED30 G. LED35 H. LED40 I. LED30HO* J. LED35HO* K. LED40HO*	F. LED30 G. LED35 H. LED40	Down R5 50° Flat, Clear Lens	Up R5 50° Flat, Clear Lens		2. Cord and Cable Oversized Canopy  Drivers mounted inside oversized canopy	
GL-6587 2 lbs B 7.75" in 1 kg W 4" in	F. LED30 G. LED35 H. LED40 I. LED30HO* J. LED35HO* K. LED40HO*	F. LED30 G. LED35 H. LED40	Down R5 50° Flat, Clear Lens	Up R2 20° Fresnel Lens R3 30° Flat, Clear Lens			
GL-6588 2 lbs B 7.75" in 1 kg W 4" in	F. LED30 G. LED35 H. LED40 I. LED30HO* J. LED35HO* K. LED40HO*	F. LED30 G. LED35 H. LED40	Down R2 20° Fresnel Lens R3 30° Flat, Clear Lens	Up R5 50° Flat, Clear Lens			

All dimensions are nominal. *Standard two circuit.

Light Source Definition

Code	Kelvin	Reflector	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Code	Kelvin	Reflector	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens
LED30	3000K	20°	9W	+80	50000	1039*	LED30HO	3000K	20°	19W	+80	50000	2070*
		30°	9W	+80	50000	732			30°	19W	+80	50000	1446
		50°	9W	+80	50000	915			50°	19W	+80	50000	1741
LED35	3500K	20°	9W	+80	50000	1039*	LED35HO	3500K	20°	19W	+80	50000	2070*
		30°	9W	+80	50000	732			30°	19W	+80	50000	1446
		50°	9W	+80	50000	915			50°	19W	+80	50000	1741
LED40	4000K	20°	9W	+80	50000	1039*	LED40HO	4000K	20°	19W	+80	50000	2070*
		30°	9W	+80	50000	732			30°	19W	+80	50000	1446
		50°	9W	+80	50000	915			50°	19W	+80	50000	1741

Universal Voltage unless otherwise specified
*Pending LM79 testing