

PHOENIX

Interior LED Pendant



9777 Reavis Park Drive
St. Louis, MO 63123

800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency high-power LED. Lumen maintenance +90% over 50,000 hour life. Light source is field replaceable.

Driver: Standard 1% 0-10V dimming. Max remote driver installation distance: 25ft from fixture body. Universal voltage 120-277V.


Body: Cast aluminum.

Canopy: Matches fixture finish. Low profile canopy may be mounted on flat or sloped ceilings up to 40°.

Cable Hanger Option: Supplied with standard 72" white cord and cable. Field adjustable.

Finish: Highly durable oven cured no VOC premium powder coat.

Surge Protection: External surge protector provided as standard.

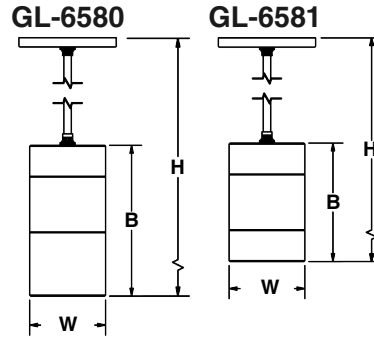

SAMPLE CATALOG NUMBER:						
GL-6580-	B-	R2-	TBL-	1-	A-	036
MODEL NO.	LAMPING	REFLECTOR	FINISH	HANGER	OPTIONS	OVERALL HEIGHT
GL-6580 4lbs 2kg W 3 3/4in 95mm B 7 3/4in 195mm H 36in 915mm	C. LED30 B. LED35 E. LED40 F. LED30HO G. LED35HO H. LED40HO	Down R2 20° Fresnel Lens R3 30° Flat, Clear Lens	Standard: Powder Coat BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze PG -Pine Green DO -Deep Orange PV -Purple Violet NB -Navy Blue Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBZ -Textured Bronze TST -Stone	1. Stem Mount Remote Driver Driver mounted remotely. 2. Cord Driver mounted remotely. 3. Stem Mount Oversized Canopy 12" Canopy 4. Cord Mount Oversized Canopy Standard white power cord. 12" Canopy.	A. No Options EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. BC. Black Cord Fixture supplied with black power cord. LC. 150" Cord Fixture supplied with 150" of standard white cord or optional black cord. EXT. Exterior Wet Location available on stem mount only.	Specify overall height in inches for hanger styles 1 & 3.
GL-6581 4lbs 2kg W 3 3/4in 95mm B 6in 150mm H 36in 915mm	C. LED30 B. LED35 E. LED40 F. LED30HO G. LED35HO H. LED40HO	Down R5 50° Flat, Clear Lens	(Same as GL-6580)	(Same as GL-6580)	(Same as GL-6580)	(Same as GL-6580)

All dimensions are nominal.

Light Source Definition

Code	Kelvin	Reflector	Wattage	CRI	Delivered Lumens	Code	Kelvin	Reflector	Wattage	CRI	Delivered Lumens
LED30	3000K	20°	14W	+80	1462*	LED30HO	3000K	20°	19W	+80	2070*
		30°	14W	+80	1030			30°	19W	+80	1446
		50°	14W	+80	1284			50°	19W	+80	1741
LED35	3500K	20°	14W	+80	1462*	LED35HO	3500K	20°	19W	+80	2070*
		30°	14W	+80	1030			30°	19W	+80	1446
		50°	14W	+80	1284			50°	19W	+80	1741
LED40	4000K	20°	14W	+80	1462*	LED40HO	4000K	20°	19W	+80	2070*
		30°	14W	+80	1030			30°	19W	+80	1446
		50°	14W	+80	1284			50°	19W	+80	1741

Universal Voltage unless otherwise specified
*Pending LM79 testing