

# PRIORITY - High Output

## Schoolhouse Interior Surface Mount



9777 Reavis Park Drive

St. Louis, MO 63123

800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

**LED:** High efficiency LEDs are field serviceable.

**Heatsink:** Only available in black anodized.

**LED Dimming:** Standard 0-10V dimming. TRIAC, DALI, or DMX available upon request.



**Body:** 18ga steel or .050 aluminum glass fitter.

**Glass:** White opal diffuser hand blown in the USA.

**Modifications:** Consult factory for lamping options.

**Finish:** Highly durable oven cured no VOC premium powder coat.

**Surge Protection:** External surge protector provided as standard.

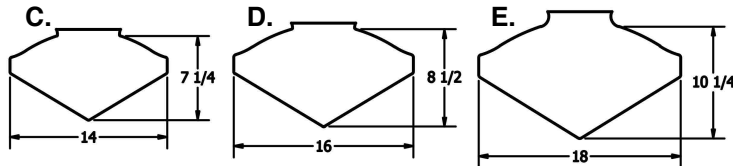

| SAMPLE CATALOG NUMBER:<br>GL-3575-             |  |   |   |  |
|--|--|---|---|--|
| MODEL NO.                                      | AA5-   | D-  | NSN-  | A-   |
| MODEL NO.                                      | LAMPING  | GLASS   | FINISH  | OPTION(S)  |
| <b>GL-3575</b><br>Driver mounted inside canopy | <b>AA0.</b> 1LED30L<br><b>AA5.</b> 1LED35L<br><b>AA4.</b> 1LED40L<br><b>BB0.</b> 1LED30M<br><b>BB5.</b> 1LED35M<br><b>BB4.</b> 1LED40M | 6" Fitter:<br><b>C.</b> 14" x 7 1/4"<br><b>D.</b> 16" x 8 1/2"<br><b>E.</b> 18" x 10 1/4" | <b>Standard:</b><br>Powder Coat<br><b>BLK-</b> Black<br><b>BL-</b> Blue<br><b>GR-</b> Gray<br><b>LG-</b> Light Gray<br><b>BE-</b> Beige<br><b>PAB-</b> Antique Brass<br><b>PA-</b> Painted Aluminum<br><b>PTC-</b> Painted Copper<br><b>WH-</b> White<br><b>DBZ-</b> Dark Bronze<br><b>NSN-</b> New Satin Nickel<br><b>BRN-</b> Brown<br><b>RD-</b> Red<br><b>CH-</b> Champagne<br><b>RG-</b> Reed Green<br><b>SG-</b> Sungold<br><b>GM-</b> Gun Metal<br><b>POR-</b> Oil Rubbed Bronze<br><b>PG-</b> Pine Green<br><b>DO-</b> Deep Orange<br><b>PV-</b> Purple Violet<br><b>NB-</b> Navy Blue<br><br><b>Textured Powder</b><br><b>TLV-</b> Light Verdigris<br><b>TWH-</b> Textured White<br><b>TBL-</b> Textured Black<br><b>TS-</b> Textured Silver<br><b>TBZ-</b> Textured Bronze<br><b>TST-</b> Stone | <b>A.</b> No Options<br><b>B.</b> Damp Location<br>Available in powder coat or Satin Aluminum finish.<br><b>EL.</b> Emergency LED<br>Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.<br><b>IEL.</b> Integral Emergency LED<br>Integrally mounted emergency driver. |

All dimensions are nominal.

### Light Source Definition

| Code | LED     | Total Wattage | Delivered Lumens | Kelvin | CRI |
|------|---------|---------------|------------------|--------|-----|
| AA0  | 1LED30L | 34            | 3520             | 3000   | 80  |
| AA5  | 1LED35L | 34            | 3520             | 3500   | 80  |
| AA4  | 1LED40L | 34            | 3520             | 4000   | 80  |
| BB0  | 1LED30M | 48            | 4567             | 3000   | 80  |
| BB5  | 1LED35M | 48            | 4567             | 3500   | 80  |
| BB4  | 1LED40M | 48            | 4567             | 4000   | 80  |

Universal Voltage unless otherwise specified.