

# ZIRCON

## Interior LED Pendant - Power Over Aircraft Cable



9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@lighting.com www.lighting.com

### GENERAL SPECIFICATION

**LED:** High efficiency high-power LEDs. Universal 120-277V input voltage.

**LED Dimming:** Standard 1% 0-10V dimming.

**Driver:** Max remote driver installation distance: 25ft from fixture body.

Single Circuit only.

**Body:** Cast aluminum.

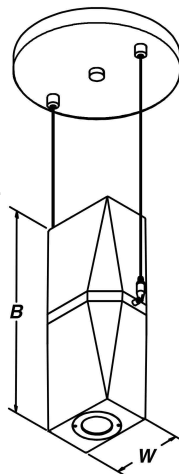
**Power Over Aircraft Cable:** Standard 120" cables for on-site adjustability.

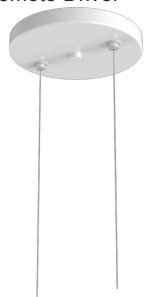

**Canopy:** Matches fixture finish.

**Finish:** Highly durable oven cured no VOC premium powder coat.

**Surge Protection:** External surge protector provided as standard.

**Modified:** Contact factory for modified lumen packages.



SAMPLE CATALOG NUMBER:						
GL-6624-	B-	R3-	R3-	RD-	1-	A
MODEL NO.	LAMPING	OPTIC DOWN	OPTIC UP	FINISH	HANGER	OPTION(S)
<b>GL-6624</b> W 5 1/4" 4lbs B 6 1/2" 1.8kg H 8-120"	A. 1LED30 B. 1LED35 C. 1LED40 D. 1LED30MID E. 1LED35MID F. 1LED40MID	Down R2. 20deg R3. 30deg R5. 50deg	Up R2. 20deg R3. 30deg R5. 50deg NA. No Light	Standard: Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze PG-Pine Green DO-Deep Orange PV-Purple Violet NB-Navy Blue  Textured Powder TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBZ-Textured Bronze TST-Stone	1. Cable Mount Remote Driver  Drivers mounted remotely	A. No Options EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
<b>GL-6625</b> W 6 3/4" 6lbs B 12 1/2" 2.7kg H 14-120"	A. 1LED30 B. 1LED35 C. 1LED40 D. 1LED30MID E. 1LED35MID F. 1LED40MID	R2. 20deg R3. 30deg R5. 50deg	R2. 20deg R3. 30deg R5. 50deg NA. No Light		2. Cable Mount Oversized Canopy  Drivers mounted inside 10.125" dia oversized canopy	
<b>GL-6626</b> W 6 3/4" 6lbs B 12 1/2" 2.7kg H 14-120"	G. 1LED30HO H. 1LED35HO I. 1LED40HO	R2. 20deg R3. 30deg R5. 50deg	NA. No Light			

All dimensions are nominal.

### Light Source Definition

— Specifications per side —							— Specifications per side —						
CODE	LED	CRI	Wattage	Rated Life Hrs	Delivered Lumens	Kelvin	CODE	LED	CRI	Wattage	Rated Life Hrs	Delivered Lumens	Kelvin
A	1LED30	+80	13W	50000	1350	3000	G	1LED30HO	+80	26W	50000	2566	3000
B	1LED35	+80	13W	50000	1350	3500	H	1LED35HO	+80	26W	50000	2566	3500
C	1LED40	+80	13W	50000	1350	4000	I	1LED40HO	+80	26W	50000	2566	4000
D	1LED30MID	+80	18W	50000	1909	3000							
E	1LED35MID	+80	18W	50000	1909	3500							
F	1LED40MID	+80	18W	50000	1909	4000							

Universal Voltage unless otherwise specified.