

BEAM RGB+W

Exterior Sconce



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@lighting.com www.lighting.com

GENERAL SPECIFICATION

RGB+White: LED lamping options (RGB30, RGB35, & RGB40) feature RGB color changing plus a full power white channel. DMX controller supplied by others.

RGB: LED lamping option features RGB color changing. DMX controller supplied by others. Static Color: LED options (Red, Green, or Blue) feature static color.

LED: High efficiency mid-power LEDs are field serviceable.

LED Dimming: Standard 0-10V dimming when static color specified.

LED Driver: Driver remotely mounted up to 10' from fixture body.

Body: Extruded aluminum wall plate and rails. Body hinges for easy serviceability.

Diffuser: Extruded polycarbonate lens is UL-94 HB Flame Class rated.


Standard Finishes: Highly durable oven cured no VOC premium powder coat.

Design: Aluminum die cast end caps and decorative bars.

Modified: Contact factory for modified lengths, lamping and decorative fronts.

Exterior Mounting: Gasketed between wall and wall plate.

Listing: Fixture ETL listed for wet locations.

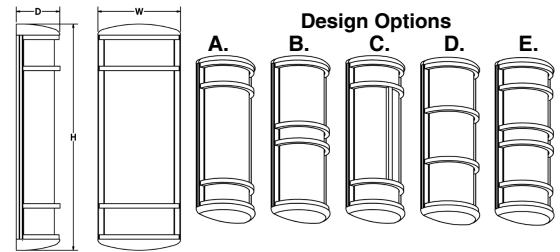

SAMPLE CATALOG NUMBER:					
GL-5451-	H-	S-	PA-	A-	A
MODEL NO.	LAMPING	DIFFUSER	FINISH	DESIGN	OPTION(S)
GL-5450 W in 7 1/4" mm 185 H in 17" mm 430 5lbs 2.3kg D in 3 7/8" mm 125	Y. RED Z. GREEN AA. BLUE BB. RGB CC. 14RGB30 DD. 14RGB35 EE. 14RGB40	Standard: S. Satin White Polycarbonate is UL-94 HB Flame Class rated.	Standard: Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze PG-Pine Green DO-Deep Orange PV-Purple Violet NB-Navy Blue Textured Powder TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBZ-Textured Bronze TST-Stone	Standard: A. Optional: B. C. D. E. Not available with GL-5450	A. No Options EL. Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.
GL-5451 W in 7 1/4" mm 185 H in 25" mm 635 7lbs 3.2kg D in 3 7/8" mm 125	FF. RED GG. GREEN HH. BLUE II. RGB JJ. 14RGB30 KK. 14RGB35 LL. 14RGB40 MM. 28RGB30 NN. 28RGB35 OO. 28RGB40				
GL-5452 W in 7 1/4" mm 185 H in 37" mm 940 10lbs 4.5kg D in 3 7/8" mm 125	PP. RED QQ. GREEN RR. BLUE SS. RGB TT. 21RGB30 UU. 21RGB35 VV. 21RGB40 WW. 42RGB30 XX. 42RGB35 YY. 42RGB40				
GL-5453 W in 7 1/4" mm 185 H in 49" mm 1245 14lbs 6.3kg D in 3 7/8" mm 125	ZZ. RED AB. GREEN AC. BLUE AD. RGB AE. 28RGB30 AF. 28RGB35 AG. 28RGB40 AH. 56RGB30 AI. 56RGB35 AJ. 56RGB40				

All dimensions are nominal.

Light Source Definition

Lamp	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Lamp	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
14RGB30	14W	+80	50000	1244	3000	28RGB30	28W	+80	50000	2409	3000
14RGB35	14W	+80	50000	1244	3500	28RGB35	28W	+80	50000	2409	3500
14RGB40	14W	+80	50000	1244	4000	28RGB40	28W	+80	50000	2409	4000
21RGB30	21W	+80	50000	1745	3000	42RGB30	42W	+80	50000	3591	3000
21RGB35	21W	+80	50000	1745	3500	42RGB35	42W	+80	50000	3591	3500
21RGB40	21W	+80	50000	1745	4000	42RGB40	42W	+80	50000	3591	4000
						56RGB30	56W	+80	50000	4870	3000
						56RGB35	56W	+80	50000	4870	3500
						56RGB40	56W	+80	50000	4870	4000

Universal Voltage unless otherwise specified.

