

BEAM with LED SPOT

Exterior Sconce




9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

- LED Up/Down Light:** Non-dimming 3.6W 225 lumen LED spot.
- LED Reflector:** 40° and 60° reflectors available.
- LED:** High efficiency +90CRI mid-power LEDs are field serviceable.
- LED Dimming:** 0-10V dimming standard.
- Body:** Extruded aluminum wall plate and rails. Body hinges for easy serviceability.
- Diffuser:** Extruded polycarbonate lens is UL-94 HB Flame Class rated.
- Standard Finishes:** Highly durable oven cured no VOC premium powder coat.
- Design:** Aluminum die cast end caps and decorative bars.
- Modified:** Contact factory for modified lengths, lamping and decorative fronts.
- Exterior Mounting:** Gasketed between wall and wall plate.
- Listing:** Fixture ETL listed for wet locations.

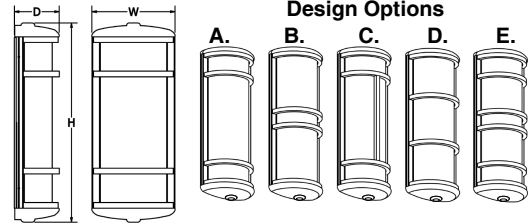

SAMPLE CATALOG NUMBER:							
GL-5461-		G-	C-	S-	PA-	A-	A
MODEL NO.	LAMPING	DIRECTION	DIFFUSER	FINISH	DESIGN	OPTION(S)	
GL-5460 W in 7 1/4" H in 17 1/2" 5lbs D in 3 7/8"	A. 13LED30 C. 13LED40	A. 40° Uplight & No Downlight B. 60° Uplight & No Downlight C. 40° Downlight & No Uplight D. 60° Downlight & No Uplight E. 40° Up & Down F. 60° Up & Down G. 40° Up 60° Down H. 60° Up 40° Down	Standard: S. Satin White Polycarbonate is UL-94 HB Flame Class rated.	Standard: Powder Coat BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze PG -Pine Green DO -Deep Orange PV -Purple Violet NB -Navy Blue Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBZ -Textured Bronze TST -Stone	Standard: A. Optional: B. C. D. E. Not available with GL-5460	A. No Options EL. Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.	
GL-5461 W in 7 1/4" H in 27 1/2" 7lbs D in 3 7/8"	D. 13LED30 F. 13LED40 G. 26LED30 I. 26LED40						
GL-5462 W in 7 1/4" H in 39 1/2" 10lbs D in 3 7/8"	K. 20LED30 M. 20LED40 N. 39LED30 P. 39LED40						
GL-5463 W in 7 1/4" H in 51 1/2" 14lbs D in 3 7/8"	R. 26LED30 T. 26LED40 U. 52LED30 W. 52LED40						

All dimensions are nominal.

Light Source Definition

Code	LED	CRI	Delivered Lumens	Kelvin	Spot LED	Reflector	CRI	Lumens	Kelvin
13LED30	13W	+90	1244	3000	3.6W	40°	80	225	3000 & 4000
13LED40	13W	+90	1244	4000	3.6W	60°	80	225	3000 & 4000
20LED30	20W	+90	1745	3000					
20LED40	20W	+90	1745	4000					
26LED30	26W	+90	2409	3000					
26LED40	26W	+90	2409	4000					
39LED30	39W	+90	3591	3000					
39LED40	39W	+90	3591	4000					
52LED30	52W	+90	4870	3000					
52LED40	52W	+90	4870	4000					

Universal Voltage unless otherwise specified.
Contact factory for availability of other lamp configurations.

