

# BEAM

## ADA Interior Sconce




9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@lighting.com www.lighting.com

### GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs are field serviceable.
- LED Dimming:** 0-10V dimming standard.
- Body:** Extruded aluminum wall plate and rails. Body hinges for easy serviceability.
- Diffuser:** Extruded polycarbonate lens is UL-94 HB Flame Class rated.
- Standard Finishes:** Highly durable oven cured no VOC premium powder coat.
- Design:** Aluminum die cast end caps and decorative bars.
- Modified:** Contact factory for modified lengths, lamping and decorative fronts.

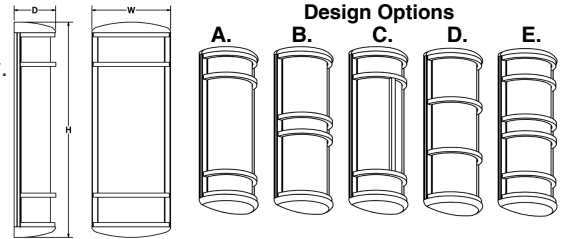

SAMPLE CATALOG NUMBER:						
GL-4451-		E-	S-	PA-	A-	A
MODEL NO.	LAMPING	DIFFUSER	FINISH	DESIGN	OPTION(S)	
<b>GL-4449</b> W 7 1/4" in H 12" in 4lbs 1.8kg	<b>AK.</b> 9LED30 <b>AL.</b> 9LED35 <b>AM.</b> 9LED40	<b>Standard:</b> <b>S.</b> Satin White  Polycarbonate is UL-94 HB Flame Class rated.	<b>Standard:</b> Powder Coat <b>BLK</b> -Black <b>BL</b> -Blue <b>GR</b> -Gray <b>LG</b> -Light Gray <b>BE</b> -Beige <b>PAB</b> -Antique Brass <b>PA</b> -Painted Aluminum <b>PTC</b> -Painted Copper <b>WH</b> -White <b>DBZ</b> -Dark Bronze <b>NSN</b> -New Satin Nickel <b>BRN</b> -Brown <b>RD</b> -Red <b>CH</b> -Champagne <b>RG</b> -Reed Green <b>SG</b> -Sungold <b>GM</b> -Gun Metal <b>POR</b> -Oil Rubbed Bronze <b>PG</b> -Pine Green <b>DO</b> -Deep Orange <b>PV</b> -Purple Violet <b>NB</b> -Navy Blue  Textured Powder <b>TLV</b> -Light Verdigris <b>TWH</b> -Textured White <b>TBL</b> -Textured Black <b>TS</b> -Textured Silver <b>TBZ</b> -Textured Bronze <b>TST</b> -Stone	<b>Standard:</b> <b>A.</b>  <b>Optional:</b> <b>B.</b> <b>C.</b> <b>D.*</b> <b>E.*</b>  *D&E not available with GL-4449. *E not available with GL-4450.	<b>A.</b> No Options <b>EL.</b> Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage. <b>IEL.</b> Integral Emergency LED Integrally mounted emergency driver. GL-4451 - GL-4453 only. For applications with ambient operating temperatures between 32°-131°F.	
<b>GL-4450</b> W 7 1/4" in H 17" in 5lbs 2.3kg	<b>A.</b> 13LED30 <b>B.</b> 13LED35 <b>C.</b> 13LED40					
<b>GL-4451</b> W 7 1/4" in H 25" in 7lbs 3.2kg	<b>D.</b> 13LED30 <b>E.</b> 13LED35 <b>F.</b> 13LED40 <b>G.</b> 26LED30 <b>H.</b> 26LED35 <b>I.</b> 26LED40					
<b>GL-4452</b> W 7 1/4" in H 37" in 10lbs 4.5kg	<b>K.</b> 20LED30 <b>L.</b> 20LED35 <b>M.</b> 20LED40 <b>N.</b> 39LED30 <b>O.</b> 39LED35 <b>P.</b> 39LED40					
<b>GL-4453</b> W 7 1/4" in H 49" in 14lbs 6.3kg	<b>R.</b> 26LED30 <b>S.</b> 26LED35 <b>T.</b> 26LED40 <b>U.</b> 52LED30 <b>V.</b> 52LED35 <b>W.</b> 52LED40					

All dimensions are nominal.

### Light Source Definition

Lamp	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Lamp	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
9LED30	9W	+90	50000	478	3000	26LED30	26W	+90	50000	2409	3000
9LED35	9W	+90	50000	478	3500	26LED35	26W	+90	50000	2409	3500
9LED40	9W	+90	50000	478	4000	26LED40	26W	+90	50000	2409	4000
13LED30	13W	+90	50000	1244	3000	39LED30	39W	+90	50000	3591	3000
13LED35	13W	+90	50000	1244	3500	39LED35	39W	+90	50000	3591	3500
13LED40	13W	+90	50000	1244	4000	39LED40	39W	+90	50000	3591	4000
20LED30	20W	+90	50000	1745	3000	52LED30	52W	+90	50000	4870	3000
20LED35	20W	+90	50000	1745	3500	52LED35	52W	+90	50000	4870	3500
20LED40	20W	+90	50000	1745	4000	52LED40	52W	+90	50000	4870	4000

Universal Voltage unless otherwise specified.  
Contact factory for availability of other lamp configurations.

