

# BEAM with LED SPOT

## ADA Interior Sconce




9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

- LED Up/Down Light:** Non-dimming 3.6W 225 lumen LED spot.
- LED Reflector:** 40° and 60° reflectors available.
- LED:** High efficiency mid-power LEDs are field serviceable.
- LED Dimming:** 0-10V dimming standard.
- Body:** Extruded aluminum wall plate and rails. Body hinges for easy serviceability.
- Diffuser:** Extruded polycarbonate lens is UL-94 HB Flame Class rated.
- Standard Finishes:** Highly durable oven cured no VOC premium powder coat.
- Design:** Aluminum die cast end caps and decorative bars.
- Modified:** Contact factory for modified lengths, lamping and decorative fronts.

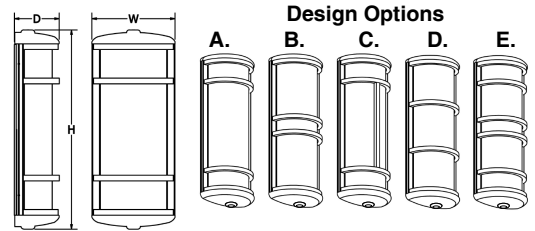

SAMPLE CATALOG NUMBER:							
GL-4461-		G-	C-	S-	PA-	A-	A
MODEL NO.	LAMPING	DIRECTION	DIFFUSER	FINISH	DESIGN	OPTION(S)	
<b>GL-4460</b> W 7 1/4" in H 17 1/2" in 5lbs D 3 7/8" in 2.3kg	<b>A.</b> 13LED30 <b>C.</b> 13LED40	<b>A.</b> 40° Uplight & No Downlight <b>B.</b> 60° Uplight & No Downlight <b>C.</b> 40° Downlight & No Uplight	<b>Standard:</b> <b>S.</b> Satin White  Polycarbonate is UL-94 HB Flame Class rated.	<b>Standard:</b> Powder Coat <b>BLK</b> -Black <b>BL</b> -Blue <b>GR</b> -Gray <b>LG</b> -Light Gray <b>BE</b> -Beige <b>PAB</b> -Antique Brass <b>PA</b> -Painted Aluminum <b>PTC</b> -Painted Copper <b>WH</b> -White <b>DBZ</b> -Dark Bronze <b>NSN</b> -New Satin Nickel <b>BRN</b> -Brown <b>RD</b> -Red <b>CH</b> -Champagne <b>RG</b> -Reed Green <b>SG</b> -Sungold <b>GM</b> -Gun Metal <b>POR</b> -Oil Rubbed Bronze <b>PG</b> -Pine Green <b>DO</b> -Deep Orange <b>PV</b> -Purple Violet <b>NB</b> -Navy Blue  <b>Textured Powder</b> <b>TLV</b> -Light Verdigris <b>TWH</b> -Textured White <b>TBL</b> -Textured Black <b>TS</b> -Textured Silver <b>TBZ</b> -Textured Bronze <b>TST</b> -Stone	<b>Standard:</b> <b>A.</b> <b>Optional:</b> <b>B.</b> <b>C.</b> <b>D.</b> <b>E.</b> Not available with GL-4460	<b>A.</b> No Options <b>EL.</b> Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.	
<b>GL-4461</b> W 7 1/4" in H 27 1/2" in 7lbs D 3 7/8" in 3.2kg	<b>D.</b> 13LED30 <b>F.</b> 13LED40 <b>G.</b> 26LED30 <b>I.</b> 26LED40	<b>D.</b> 60° Downlight & No Uplight <b>E.</b> 40° Up & Down <b>F.</b> 60° Up & Down <b>G.</b> 40° Up 60° Down <b>H.</b> 60° Up 40° Down					
<b>GL-4462</b> W 7 1/4" in H 39 1/2" in 10lbs D 3 7/8" in 4.5kg	<b>K.</b> 20LED30 <b>M.</b> 20LED40 <b>N.</b> 39LED30 <b>P.</b> 39LED40						
<b>GL-4463</b> W 7 1/4" in H 51 1/2" in 14lbs D 3 7/8" in 6.3kg	<b>R.</b> 26LED30 <b>T.</b> 26LED40 <b>U.</b> 52LED30 <b>W.</b> 52LED40						

All dimensions are nominal.

### Light Source Definition

Code	LED	CRI	Delivered Lumens	Kelvin	Spot LED	Reflector	CRI	Lumens	Kelvin
13LED30	13W	+90	1244	3000	3.6W	40°	80	225	3000 & 4000
13LED40	13W	+90	1244	4000	3.6W	60°	80	225	3000 & 4000
20LED30	20W	+90	1745	3000					
20LED40	20W	+90	1745	4000					
26LED30	26W	+90	2409	3000					
26LED40	26W	+90	2409	4000					
39LED30	39W	+90	3591	3000					
39LED40	39W	+90	3591	4000					
52LED30	52W	+90	4870	3000					
52LED40	52W	+90	4870	4000					

Universal Voltage unless otherwise specified.  
Contact factory for availability of other lamp configurations.

