

BEAM TUNABLE WHITE

ADA Interior Sconce



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

Tunable White: LED option (TW) features tunable white technology that adjusts from 6500K-2700K. For proper control, fixture needs two 0-10V dimming controls.

LED Tuning: CCT tunable using 0-10V wall control. TRIAC, DALI, or DMX available upon request.

LED Dimming: Intensity adjustable using 0-10V wall control. TRIAC, DALI, or DMX available upon request.


LED Driver: Driver remotely mounted up to 10' from fixture body.

Body: Extruded aluminum wall plate and rails. Body hinges for easy serviceability.
Diffuser: Extruded polycarbonate lens is UL-94 HB Flame Class rated.

Standard Finishes: Highly durable oven cured no VOC premium powder coat.

Design: Aluminum die cast end caps and decorative bars.

Modified: Contact factory for modified lengths, lamping and decorative fronts.

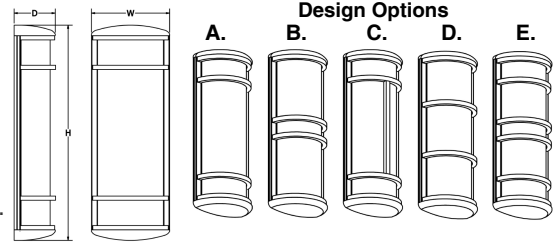

SAMPLE CATALOG NUMBER:						
GL-4451-		14TW-	S-	PA-	A-	A
MODEL NO.	LAMPING	DIFFUSER	FINISH	DESIGN	OPTION(S)	
GL-4450 W in 7 1/4" mm 185 H in 17" mm 430 5lbs 2.3kg	14TW	Standard: S. Satin White Polycarbonate is UL-94 HB Flame Class rated.	Standard: Powder Coat BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze PG -Pine Green DO -Deep Orange PV -Purple Violet NB -Navy Blue Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBZ -Textured Bronze TST -Stone	Standard: A. Optional: B. C. D. E. Not available with GL-4450	A. No Options EL. Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.	
GL-4451 W in 7 1/4" mm 185 H in 25" mm 635 7lbs 3.2kg	14TW 28TW					
GL-4452 W in 7 1/4" mm 185 H in 37" mm 940 10lbs 4.5kg	21TW 42TW					
GL-4453 W in 7 1/4" mm 185 H in 49" mm 1245 14lbs 6.3kg	28TW 56TW					

All dimensions are nominal.

Light Source Definition

Code	Total Wattage	Delivered Lumens	Kelvin
14TW	14W	1244	2700-6500
21TW	21W	1745	2700-6500
28TW	28W	2409	2700-6500
42TW	42W	3591	2700-6500
56TW	56W	4870	2700-6500

Universal Voltage unless otherwise specified.