

# CONE

## Interior Pendant




9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

**LED:** High efficiency mid-power LEDs.  
**Uplight:** Optional uplight is wired on a second circuit. Standard satin white top lens.  
**LED Dimming:** Standard 1% 0-10V dimming.  
**Cable Hanger Option:** Standard 150" cable and white cord for on-site adjustability.  
**Canopy:** Matches outer fixture finish. Hanger 3 & 4 with A-O lamping option includes 10.125" dia by 2.625" H spinning. V, W, X lamping includes 12" dia by 2" H.  
**Driver:** Max remote driver installation distance 25ft from fixture body.  
**Acrylic:** Acrylic is UL-94 HB Flame Class rated.  
**Finish:** Highly durable oven cured no VOC premium powder coat.  
**Inner Finish:** Inner finish available in white, black, and gold liquid paint.  
 Non-white inner finishes will reduce lumen output.  
**Surge Protection:** External surge protector provided as standard.

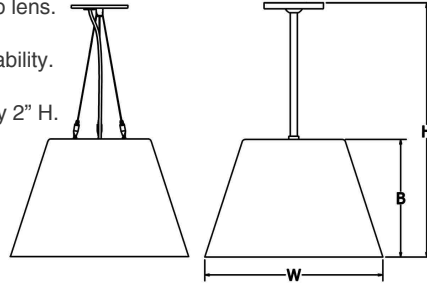

### SAMPLE CATALOG NUMBER:

GL-2350- E- K- BLK- MO- 1- A 038

MODEL NO.	LAMPING	UPLIGHT	OUTER FINISH	INNER FINISH	HANGER	OPTIONS	OVERALL HEIGHT
<b>GL-2350</b> 8lbs W 16" in 3.6kg B 11" in H 38" in	<b>A.</b> 1LED30 <b>B.</b> 1LED35 <b>C.</b> 1LED40 <b>D.</b> 1LED30 <b>E.</b> 1LED35 <b>F.</b> 1LED40	<b>NA.</b> NONE <b>P.</b> 1UPLED30 <b>Q.</b> 1UPLED35 <b>R.</b> 1UPLED40 <b>S.</b> 1UPLED30 <b>T.</b> 1UPLED35 <b>U.</b> 1UPLED40	<b>Standard:</b> Powder Coat <b>BLK-</b> Black <b>BL-</b> Blue <b>GR-</b> Gray <b>LG-</b> Light Gray <b>BE-</b> Beige <b>PAB-</b> Antique Brass <b>PA-</b> Painted Aluminum <b>PTC-</b> Painted Copper <b>WH-</b> White <b>DBZ-</b> Dark Bronze <b>NSN-</b> New Satin Nickel <b>BRN-</b> Brown <b>RD-</b> Red <b>CH-</b> Champagne <b>RG-</b> Reed Green <b>SG-</b> Sungold <b>GM-</b> Gun Metal <b>POR-</b> Oil Rubbed Bronze <b>PG-</b> Pine Green <b>DO-</b> Deep Orange <b>PV-</b> Purple Violet <b>NB-</b> Navy Blue  <b>Textured Powder</b> <b>TLV-</b> Light Verdigris <b>TWH-</b> Textured White <b>TBL-</b> Textured Black <b>TS-</b> Textured Silver <b>TBZ-</b> Textured Bronze <b>TST-</b> Stone	<b>Standard:</b> <b>MO-</b> Matches Outer Finish Liquid Paint <b>WH-</b> White <b>BLK-</b> Black <b>GL-</b> Gold	<b>1. Stem Mount Remote Driver</b>  Drivers mounted remotely <b>2. Cable Mount Remote Driver</b>  Drivers mounted remotely <b>3. Stem Mount Oversized Canopy</b>  Drivers mounted inside oversized canopy <b>4. Cable Mount Oversized Canopy</b>  Drivers mounted inside oversized canopy	<b>A.</b> No Options <b>BC.</b> Black Cord Fixture supplied with black power cord. <b>DM.</b> DMX Dimming <b>EL.</b> Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage. Downlight only.	Specify overall height in inches for hanger styles 1 & 3.
<b>GL-2351</b> 10lbs W 24" in 4.5kg B 15 3/8" in H 42" in	<b>G.</b> 1LED30 <b>H.</b> 1LED35 <b>I.</b> 1LED40 <b>J.</b> 1LED30 <b>K.</b> 1LED35 <b>L.</b> 1LED40 <b>M.</b> 1LED30 <b>N.</b> 1LED35 <b>O.</b> 1LED40 <b>V.</b> 1LED30* <b>W.</b> 1LED35* <b>X.</b> 1LED40*						
	*Downlight only.		Outer finish designated by first finish code.	Inner finish designated by second finish code.		Hanger options 1&2 supplied with remote driver box.	

All Dimensions are nominal.

### Light Source Definition

Downlight Output						Downlight Output					
Code	LED	Wattage	Lumens	Kelvin	CRI	Code	LED	Wattage	Lumens	Kelvin	CRI
A	1LED30	17W	1534	3000	80	V	1UPLED30	8W	866	3000	80
B	1LED35	17W	1534	3500	80	W	1UPLED35	68W	5076*	3500	80
C	1LED40	17W	1534	4000	80	X	1UPLED40	68W	5076*	4000	80
D	1LED30	24W	2148	3000	80						
E	1LED35	24W	2148	3500	80						
F	1LED40	24W	2148	4000	80						
G	1LED30	15W	1361	3000	80						
H	1LED35	15W	1361	3500	80						
I	1LED40	15W	1361	4000	80						
J	1LED30	26W	2334	3000	80						
K	1LED35	26W	2334	3500	80						
L	1LED40	26W	2334	4000	80						
M	1LED30	39W	3501	3000	80						
N	1LED35	39W	3501	3500	80						
O	1LED40	39W	3501	4000	80						

\*Projected

### Uplight Output

Code	LED	Wattage	Lumens	Kelvin	CRI
P	1UPLED30	8W	866	3000	80
Q	1UPLED35	8W	866	3500	80
R	1UPLED40	8W	866	4000	80
S	1UPLED30	12W	1213	3000	80
T	1UPLED35	12W	1213	3500	80
U	1UPLED40	12W	1213	4000	80

Universal Voltage unless otherwise specified.

Fixture tested with white inner finish. Non-white inner finishes will reduce lumen output.

