

COUplet

Interior ADA Sconce




9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

- LED:** High efficiency +90CRI mid-power LEDs are field serviceable.
- LED Dimming:** Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request. Integral driver.
- Body:** Spun .050 aluminum or 18ga steel.
- Acrylic:** Seamless acrylic is UL-94 HB Flame Class rated.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Modifications:** Consult factory for lamping options.
- Surge Protection:** External surge protector provided as standard.

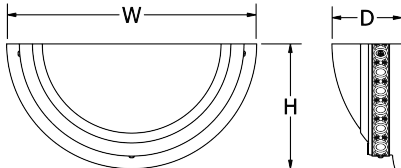

SAMPLE CATALOG NUMBER:				
GL-4150-	L15-	W-	SN-	A
MODEL NO.	LAMPING	ACRYLIC	FINISH	OPTION(S)
GL-4150 W in 14 1/8" mm 360 H in 7" mm 180 5lbs 2.3kg D in 4" mm 100	L10. 1LED30 L15. 1LED35 L14. 1LED40	Standard: W. White Opal Optional: S. Satin White Acrylic is UL-94 HB Flame Class rated.	Standard: Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze PG-Pine Green DO-Deep Orange PV-Purple Violet NB-Navy Blue Textured Powder TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBZ-Textured Bronze TST-Stone	A. No Options EL. Emergency LED Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage. L. Perforated Top Lens Painted white perforated metal top lens. TL. Acrylic Top Lens White acrylic top lens.
GL-4151 W in 21" mm 535 H in 10 1/2" mm 265 7lbs 3.2kg D in 4" mm 100	L10. 1LED30 L15. 1LED35 L14. 1LED40			

All dimensions are nominal.

Light Source Definition

Code	Total Wattage	CRI	Rated Life Hrs	Board Lumens	Kelvin
L10	13	+90	50000	1895	3000
L15	13	+90	50000	1895	3500
L14	13	+90	50000	1895	4000

Universal Voltage unless otherwise specified.
Contact factory for availability of other lamp configurations.