

# CROSSROAD

## Indoor Surface Mount





9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@lighting.com www.lighting.com

### GENERAL SPECIFICATION

- LED:** High efficiency +90CRI mid-power LEDs are field serviceable.
- LED Dimming:** 1% 0-10V dimming standard with LED lamping option.
- Body:** Body formed with 18ga steel.
- Acrylic:** UL-94 HB Flame Class rated.
- Modifications:** Consult factory for lamping, cluster, or sizing options.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Surge Protection:** External surge protector provided as standard.

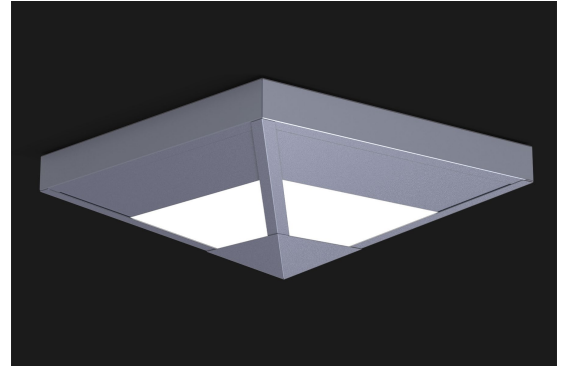

SAMPLE CATALOG NUMBER: GL-3607-					L85-	W-	NSN-	A-
MODEL NO.	LAMPING		ACRYLIC	FINISH	OPTION(S)			
<b>GL-3605</b> 21lbs W in 24" mm 610 10kg D in 9" mm 225	<b>L40.</b> 4LED30 <b>L45.</b> 4LED35 <b>L44.</b> 4LED40	<b>IN4.</b> 4MED	Standard: W. White Opal  Optional: S. Satin White  Acrylic is UL-94 HB Flame Class rated.	Standard: Powder Coat <b>BLK</b> -Black <b>BL</b> -Blue <b>GR</b> -Gray <b>LG</b> -Light Gray <b>BE</b> -Beige <b>PAB</b> -Antique Brass <b>PA</b> -Painted Aluminum <b>PTC</b> -Painted Copper <b>WH</b> -White <b>DBZ</b> -Dark Bronze <b>NSN</b> -New Satin Nickel <b>BRN</b> -Brown <b>RD</b> -Red <b>CH</b> -Champagne <b>RG</b> -Reed Green <b>SG</b> -Sungold <b>GM</b> -Gun Metal <b>POR</b> -Oil Rubbed Bronze <b>PG</b> -Pine Green <b>DO</b> -Deep Orange <b>PV</b> -Purple Violet <b>NB</b> -Navy Blue  Textured Powder <b>TLV</b> -Light Verdigris <b>TWH</b> -Textured White <b>TBL</b> -Textured Black <b>TS</b> -Textured Silver <b>TBZ</b> -Textured Bronze <b>TST</b> -Stone	<b>A.</b> No Options <b>B.</b> Damp Location Available in powder coat finish. <b>EL.</b> Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131 °F. LED only. Specify 120 or 277 voltage.			
<b>GL-3606</b> 28lbs W in 30" mm 760 13kg D in 10 1/2" mm 265	<b>L80.</b> 8LED30 <b>L85.</b> 8LED35 <b>L84.</b> 8LED40	<b>IN4.</b> 4MED						
<b>GL-3607</b> 37lbs W in 36" mm 915 17kg D in 12 1/8" mm 310	<b>L80.</b> 8LED30 <b>L85.</b> 8LED35 <b>L84.</b> 8LED40	<b>IN8.</b> 8MED						
<b>GL-3608</b> 52lbs W in 46" mm 1170 24kg D in 14 3/4" mm 375	<b>L80.</b> 8LED30 <b>L85.</b> 8LED35 <b>L84.</b> 8LED40	<b>F8.</b> 8CF <b>IN8.</b> 8MED						

Fixtures over 50 lbs require reinforced junction box  
All dimensions are nominal.

### Light Source Definition

Code	Total Wattage	Kelvin	Board Lumens	CRI	Code	Lamp	Fluorescent	Lamp Base
L40	52	3000	7580	+90	IN4, IN8	Med	A-19	Medium 120V
L45	52	3500	7580	+90				
L44	52	4000	7580	+90				
L80	105	3000	15160	+90				
L85	105	3500	15160	+90				
L84	105	4000	15160	+90				

Universal Voltage unless otherwise specified.  
Contact factory for availability of other lamp configurations.