

# DEMI

## Interior Pendant




9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs.
- Uplight:** Optional uplight is wired on a second circuit. Standard satin white top lens.
- LED Dimming:** Standard 1% 0-10V dimming.
- Cable Hanger Option:** Standard 150" cable and white cord for on-site adjustability.
- Canopy:** Matches outer fixture finish. Hanger 3 & 4 with A-O lamping option includes 10.125" dia by 2.625" H spinning. V, W, X lamping includes 12" dia by 2" H.
- Driver:** Max remote driver installation distance 25ft from fixture body.
- Acrylic:** Acrylic is UL-94 HB Flame Class rated.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Inner Finish:** Available in white, black, and gold liquid paint.
- Non-white inner finishes will reduce lumen output.
- Surge Protection:** External surge protector provided standard.

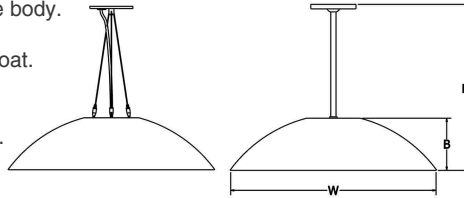

SAMPLE CATALOG NUMBER:										
GL-2360- E- K- BLK- MO- 1- A 038										
MODEL NO.	LAMPING	UPLIGHT	OUTER FINISH	INNER FINISH	HANGER	OPTIONS	OVERALL HEIGHT			
<b>GL-2360</b> 10lbs W 24" in 4.5kg B 6" in H 38" in	A. 1LED30	NA. NONE	<b>Standard:</b> Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze PG-Pine Green DO-Deep Orange PV-Purple Violet NB-Navy Blue  <b>Textured Powder</b> TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBZ-Textured Bronze TST-Stone	<b>Standard:</b> MO-Matches Outer Finish  Liquid Paint WH-White BLK-Black GL-Gold	<b>1. Stem Mount Remote Driver</b>  Drivers mounted remotely	<b>A. No Options</b> <b>BC. Black Cord</b> Fixture supplied with black power cord. <b>DM. DMX Dimming</b> <b>EL. Emergency LED</b> Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage. Downlight only.	Specify overall height in inches for hanger styles 1 & 3.			
	B. 1LED35	J. 1UPLD30						<b>2. Cable Mount Remote Driver</b>  Drivers mounted remotely		
	C. 1LED40	K. 1UPLD35							<b>3. Stem Mount Oversized Canopy</b>  Drivers mounted inside oversized canopy	
	D. 1LED30	L. 1UPLD40								<b>4. Cable Mount Oversized Canopy</b>  Drivers mounted inside oversized canopy
	E. 1LED35	M. 1UPLD30								
	F. 1LED40	N. 1UPLD35								
	G. 1LED30	O. 1UPLD40								
	H. 1LED35									
	I. 1LED40									
	V. 1LED30*									
W. 1LED35*										
X. 1LED40*										
<b>GL-2361</b> 10lbs W 30" in 4.5kg B 7 7/16" in H 40" in										
<b>GL-2362</b> 15lbs W 48" in 7kg B 12" in H 44" in										
		*Downlight only.	Outer finish designated by first finish code.	Inner finish designated by second finish code.	Hanger options 1&2 supplied with remote driver box.					

All Dimensions are nominal.

### Light Source Definition

Downlight Output						Uplight Output					
Code	LED	Total Wattage	Delivered Lumens	Kelvin	CRI	Code	LED	Total Wattage	Delivered Lumens	Kelvin	CRI
A	1LED30	15W	1695	3000	80	J	1UPLD30	8W	866	3000	80
B	1LED35	15W	1695	3500	80	K	1UPLD35	8W	866	3500	80
C	1LED40	15W	1695	4000	80	L	1UPLD40	8W	866	4000	80
D	1LED30	26W	2906	3000	80	M	1UPLD30	12W	1213	3000	80
E	1LED35	26W	2906	3500	80	N	1UPLD35	12W	1213	3500	80
F	1LED40	26W	2906	4000	80	O	1UPLD40	12W	1213	4000	80
G	1LED30	39W	4359	3000	80						
H	1LED35	39W	4359	3500	80						
I	1LED40	39W	4359	4000	80						
V	1LED30	68W	6617*	3000	80						
W	1LED35	68W	6617*	3500	80						
X	1LED40	68W	6617*	4000	80						

Universal Voltage unless otherwise specified.

\*Projected

Fixture tested with white inner finish. Non-white inner finishes will reduce lumen output.

