

# DEMI

## Interior Surface Mount





9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs.
- LED Dimming:** Standard 1% 0-10V dimming.
- Driver:** Integral in fixture body. Remote driver required for V,W,X lamping options.
- Acrylic:** Acrylic is UL-94 HB Flame Class rated.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Inner Finish:** Inner finish available in white, black, and gold liquid paint. Non-white inner finishes will reduce lumen output.
- Surge Protection:** External surge protector provided as standard.

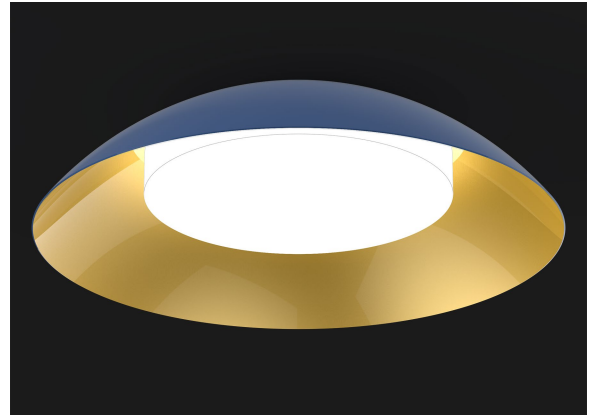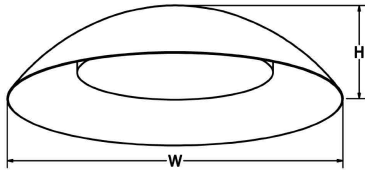

### SAMPLE CATALOG NUMBER:

GL-3360-

MODEL NO.	E-	BLK-	MO-	A
	LAMPING	OUTER FINISH	INNER FINISH	OPTIONS
<b>GL-3360</b> 10lbs W in 24" 4.5kg H in 6"	A. 1LED30 B. 1LED35 C. 1LED40 D. 1LED30 E. 1LED35 F. 1LED40	<b>Standard:</b> Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze PG-Pine Green DO-Deep Orange PV-Purple Violet NB-Navy Blue	<b>Standard:</b> MO-Matches Outer Finish Liquid Paint WH-White BLK-Black GL-Gold	A. No Options DM. DMX Dimming Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
<b>GL-3361</b> 10lbs W in 30" 4.5kg H in 7 7/16"	G. 1LED30 H. 1LED35 I. 1LED40 V. 1LED30* W. 1LED35* X. 1LED40*	Textured Powder TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBZ-Textured Bronze TST-Stone		
<b>GL-3362</b> 15lbs W in 48" 7kg H in 12"				
	*Remote Driver only.	Outer finish designated by first finish code.	Inner finish designated by second finish code.	

All Dimensions are nominal.

### Light Source Definition

Code	LED	Downlight Output		Kelvin	CRI
		Total Wattage	Delivered Lumens		
A	1LED30	15W	1695	3000	80
B	1LED35	15W	1695	3500	80
C	1LED40	15W	1695	4000	80
D	1LED30	26W	2906	3000	80
E	1LED35	26W	2906	3500	80
F	1LED40	26W	2906	4000	80
G	1LED30	39W	4359	3000	80
H	1LED35	39W	4359	3500	80
I	1LED40	39W	4359	4000	80
V	1LED30	68W	6617*	3000	80
W	1LED35	68W	6617*	3500	80
X	1LED40	68W	6617*	4000	80

\*Projected

Universal Voltage unless otherwise specified.  
Fixture tested with white inner finish. Non-white inner finishes will reduce lumen output.

