

GENERAL SPECIFICATION

LED: High efficiency +90CRI mid-power LEDs are field serviceable. Universal voltage.

LED Dimming: Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request.



Acrylic: Satin white acrylic is UL-94 HB Flame Class rated.

Cable Hanger: Comes with 72" cable and white cord for on-site adjustability.

Finish: Highly durable oven cured no VOC premium powder coat.

Fixture painted textured white.

Surge Protection: External surge protector provided as standard.

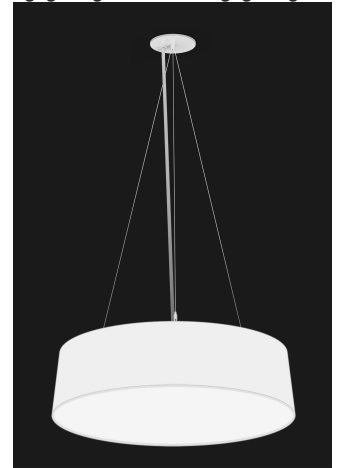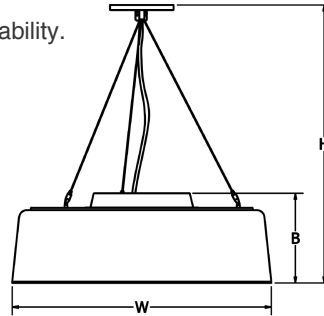

SAMPLE CATALOG NUMBER: GL-2635-		A-	1-	A
MODEL NO.		LAMPING	HANGER	OPTIONS
GL-2635 W 26" in 660 mm 10lbs B 8" in 205 mm 4.5kg H 20"-68" in 510-1730 mm Fixture Painted Textured White	A. 5LED30 B. 5LED35 C. 5LED40	1. Cable 	A. No Options LC. 150" Cord & Cable Fixture supplied with 150" of cable and standard white cord. EL. Emergency LED Remote mount up to 10' from light source in controlled environment with an area temperature range of 32"-131°F. Specify 120 or 277 voltage.	
GL-2636 W 37 1/2" in 950 mm 15lbs B 8" in 205 mm 6.8kg H 20"-68" in 510-1730 mm Fixture Painted Textured White	D. 8LED30 E. 8LED35 F. 8LED40			

All Dimensions are nominal.

Light Source Definition

Code	Total Wattage	Delivered Lumens	Kelvin	CRI
5LED30	65	7047	3000	+90
5LED35	65	7047	3500	+90
5LED40	65	7047	4000	+90
8LED30	105	11802	3000	+90
8LED35	105	11802	3500	+90
8LED40	105	11802	4000	+90

Universal Voltage unless otherwise specified.
 Contact factory for availability of other lamp configurations.