

# FORMIDABLE

## Outdoor Sconce





9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

- LED:** High efficiency +90CRI mid-power LEDs are field serviceable.
- LED Dimming:** 1% 0-10V dimming standard with LED lamping option.
- Body:** Formed .050 Al body with 1/4" x 1/2" Al rails and 1/2"sq decorative bars.
- Acrylic:** Cylinder is UL-94 HB Flame Class rated. Top and bottom lens standard.
- Standard Finishes:** Highly durable oven cured no VOC premium powder coat.
- Modified:** Contact factory for modified lengths, lamping and decorative fronts.
- Surge Protection:** External surge protector provided as standard.
- Listing:** Fixture ETL listed for wet locations.

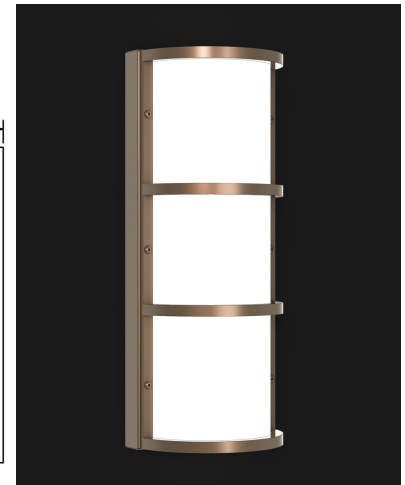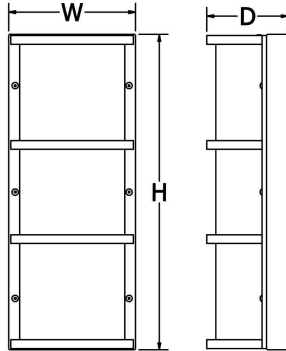

SAMPLE CATALOG NUMBER: GL-5425-				
MODEL NO.	G-	W-	NSN-	A
MODEL NO.	LAMPING	ACRYLIC	FINISH	OPTION(S)
<b>GL-5425</b> W in 7 1/4" mm 185 H in 18" mm 460 5lbs 2.3kg D in 4 3/4" mm 120	<b>F.</b> 13LED30 <b>G.</b> 13LED35 <b>H.</b> 13LED40	<b>Standard:</b> <b>W.</b> White Opal <b>Optional:</b> <b>S.</b> Satin White Acrylic is UL-94 HB Flame Class rated.	<b>Standard:</b> Powder Coat <b>BLK-</b> Black <b>BL-</b> Blue <b>GR-</b> Gray <b>LG-</b> Light Gray <b>BE-</b> Beige <b>PAB-</b> Antique Brass <b>PA-</b> Painted Aluminum <b>PTC-</b> Painted Copper <b>WH-</b> White <b>DBZ-</b> Dark Bronze <b>NSN-</b> New Satin Nickel <b>BRN-</b> Brown <b>RD-</b> Red <b>CH-</b> Champagne <b>RG-</b> Reed Green <b>SG-</b> Sungold <b>GM-</b> Gun Metal <b>POR-</b> Oil Rubbed Bronze <b>PG-</b> Pine Green <b>DO-</b> Deep Orange <b>PV-</b> Purple Violet <b>NB-</b> Navy Blue  <b>Textured Powder</b> <b>TLV-</b> Light Verdigris <b>TWH-</b> Textured White <b>TBL-</b> Textured Black <b>TS-</b> Textured Silver <b>TBZ-</b> Textured Bronze <b>TST-</b> Stone	<b>A.</b> No Options <b>EL.</b> Emergency LED Consult factory. Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. <b>F.</b> LED Up Light 4000K Metal cap standard with option. Consult factory for dimming. <b>G.</b> LED Down Light 4000K Metal cap standard with option. Consult factory for dimming. <b>H.</b> LED Up Light 3000K Metal cap standard with option. Consult factory for dimming. <b>I.</b> LED Down Light 3000K Metal cap standard with option. Consult factory for dimming.

All dimensions are nominal.

### Light Source Definition

Lamp	LED	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
13LED30	13W	+90	50000	1192	3000
13LED35	13W	+90	50000	1192	3500
13LED40	13W	+90	50000	1192	4000
UP/DOWN	4W SPOT LIGHT	80	35000	260	3000 or 4000

Universal Voltage unless otherwise specified.  
Contact factory for availability of other lamp configurations.

