

FRONTIER II

Interior Pendant



9777 Reavis Park Drive

St. Louis, MO 63123

800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency +90CRI mid-power LEDs are field serviceable.

LED Dimming: 1% 0-10V dimming standard with LED lamping option.

Acrylic: One-piece acrylic lens. Standard top and bottom satin white with all acrylic options.

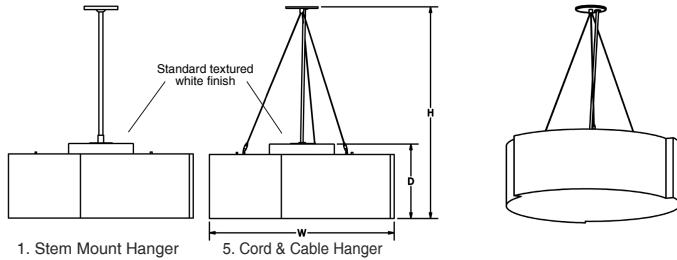
Canopy: Matches fixture finish. Low profile canopy may be mounted on flat or sloped ceilings up to 40°. Available stem or field adjustable cord and cable.



Cable Hanger Option: Supplied with standard 72" white cord and cable. Field adjustable.

Finish: Highly durable oven cured no VOC premium textured powder coat.

Modifications: Consult factory for lamping options.

Surge Protection: External surge protector provided as standard.



SAMPLE CATALOG NUMBER:						
MODEL NO.	LAMPING	ACRYLIC	FINISH	HANGER	OPTION(S)	OVERALL HEIGHT
GL-2507 W 24" in 610 mm 18lbs D 9 3/4" in 250 mm 7kg H 20" in 510 mm	L50. 5LED30 L55. 5LED35 L54. 5LED40	Standard: S Satin White Optional: WL White Linen JT Jute Linen Acrylic is UL-94 HB Flame Class rated.	Standard: Powder Coat BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze PG -Pine Green DO -Deep Orange PV -Purple Violet NB -Navy Blue Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBZ -Textured Bronze TST -Stone	1. Stem  2. Cord & Cable  Supplied with white cord with hanger.	A. No Options BC. Black Cord Fixture supplied with black power cord. Hanger option 5 only. LC. 150" Cord & Cable Supplied with 150" Cord & Cable. Hanger option 2 only. EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.	Stem mount only - Specify overall height in inches. Standard overall height shown by model no.
GL-2508 W 30" in 760 mm 20lbs D 11 3/4" in 300 mm 7.9kg H 22" in 560 mm						

All Dimensions are nominal.

Acrylic Lens



Standard satin white top and bottom diffuser with all acrylic options.

Light Source Definition

Code	Lamp	Total Wattage	Delivered Lumens	Kelvin	CRI
L50	5LED30	65W	7467	3000	+90
L55	5LED35	65W	7467	3500	+90
L54	5LED40	65W	7467	4000	+90

Universal Voltage unless otherwise specified.
 Contact factory for availability of other lamp configurations.