

HALFMOON

Interior ADA Sconce



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency +90CRI mid-power LEDs are field serviceable.

LED Dimming: Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request. Integral driver.


Body: Spun .050 aluminum or 18ga steel.

Acrylic: Seamless acrylic is UL-94 HB Flame Class rated.

Finish: Highly durable oven cured no VOC premium powder coat.

Modifications: Consult factory for lamping options.

Surge Protection: External surge protector provided as standard.

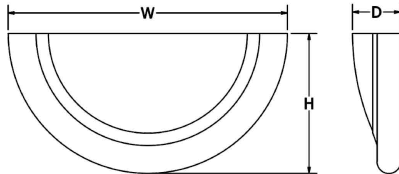

SAMPLE CATALOG NUMBER: GL-4161-					
MODEL NO.		L15-	W-	SN-	A
MODEL NO.		LAMPING	ACRYLIC	FINISH	OPTION(S)
GL-4161 W in 22 7/8" mm 580 H in 11 3/8" mm 290 7 lbs 3.2kg D in 4" mm 100		L10. 1LED30 L15. 1LED35 L14. 1LED40	Standard: W. White Opal Optional: S. Satin White Acrylic is UL-94 HB Flame Class rated.	Standard: Powder Coat BLK- Black BL- Blue GR- Gray LG- Light Gray BE- Beige PAB- Antique Brass PA- Painted Aluminum PTC- Painted Copper WH- White DBZ- Dark Bronze NSN- New Satin Nickel BRN- Brown RD- Red CH- Champagne RG- Reed Green SG- Sungold GM- Gun Metal POR- Oil Rubbed Bronze PG- Pine Green DO- Deep Orange PV- Purple Violet NB- Navy Blue Textured Powder TLV- Light Verdigris TWH- Textured White TBL- Textured Black TS- Textured Silver TBZ- Textured Bronze TST- Stone	A. No Options EL. Emergency LED Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage. L. Perforated Top Lens Painted white perforated metal top lens. TL. Acrylic Top Lens White acrylic top lens.

All dimensions are nominal.

Light Source Definition

Code	Total Wattage	Rated CRI	Rated Life Hrs	Board Lumens	Board Kelvin
L10	13	+90	50000	1895	3000
L15	13	+90	50000	1895	3500
L14	13	+90	50000	1895	4000

Universal Voltage unless otherwise specified.
Contact factory for availability of other lamp configurations.