

MARINA II

Interior Round Pendant




9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION


LED: High efficiency mid-power LEDs are field serviceable.
Lower Output: Lamping code ending with LO features lower lumen output.
LED Dimming: Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request.
Shade: Standard white fabric shade with integral satin white diffuser.
 Custom shapes, sizes, and colors available.
Canopy: Matches fixture finish. Low profile canopy may be mounted on flat or sloped ceilings up to 40°. Available stem or field adjustable cord and cable.
Cable Hanger Option: Supplied with standard 72" white cord and cable. Field adjustable.
Finish: Highly durable oven cured no VOC premium powder coat.
Modifications: Consult factory for lamping or cluster options.
Surge Protection: External surge protector provided as standard.

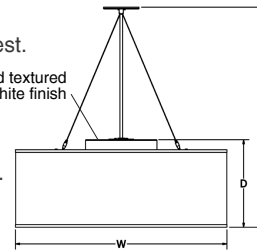

SAMPLE CATALOG NUMBER:								
GL-2742-		L55-		W-	NSN-	1-	A-	023
MODEL NO.	LAMPING	SHADE	FINISH	HANGER	OPTIONS	OVERALL HEIGHT		
GL-2740 W in 14" 5lbs 2.25kg D in 9.5" H in 21"	L10. 1LED30 L15. 1LED35 L14. 1LED40 IN3. 3MED LL10. 1LED30LO LL15. 1LED35LO LL14. 1LED40LO	W White C Cream BL Blue BK Black S Stone R Red	Standard: Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze PG-Pine Green DO-Deep Orange PV-Purple Violet NB-Navy Blue	1. Stem 5. Cord & Cable Supplied with white cord with hanger option 5.	A. No Options BC. Black Cord Fixture supplied with black power cord. EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage. LC. 150" Cord & Cable Supplied with 150" Cord & Cable.	Specify overall height for stem hanger option in inches.		
GL-2741 W in 18" 5lbs 2.25kg D in 9.5" H in 21"	L10. 1LED30 L15. 1LED35 L14. 1LED40 IN3. 3MED LL10. 1LED30LO LL15. 1LED35LO LL14. 1LED40LO	BK Black S Stone R Red						
GL-2742 W in 24" 15lbs 7kg D in 11.5" H in 23"	L50. 5LED30 L55. 5LED35 L54. 5LED40 IN3. 3MED LL50. 5LED30LO LL55. 5LED35LO LL54. 5LED40LO	Washable: WW White WC Cream WLG Lt Gray WGR Gray WBK Black WR Red WBL Blue						
GL-2743 W in 30" 18lbs 8kg D in 12.5" H in 23"	L50. 5LED30 L55. 5LED35 L54. 5LED40 IN3. 3MED LL50. 5LED30LO LL55. 5LED35LO LL54. 5LED40LO							
GL-2744 W in 36" 20lbs 9kg D in 13.5" H in 25"	L80. 8LED30 L85. 8LED35 L84. 8LED40 IN6. 6MED LL80. 8LED30LO LL85. 8LED35LO LL84. 8LED40LO							
GL-2745 W in 48" 25lbs 11.5kg D in 15.5" H in 27"	L80. 8LED30 L85. 8LED35 L84. 8LED40 IN6. 6MED LL80. 8LED30LO LL85. 8LED35LO LL84. 8LED40LO	Shade options may vary based on availability. Consult Finish Guide at glighting.com for current options.	Textured Powder TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBT-Textured Bronze TST-Stone					

All Dimensions are nominal.

Shade

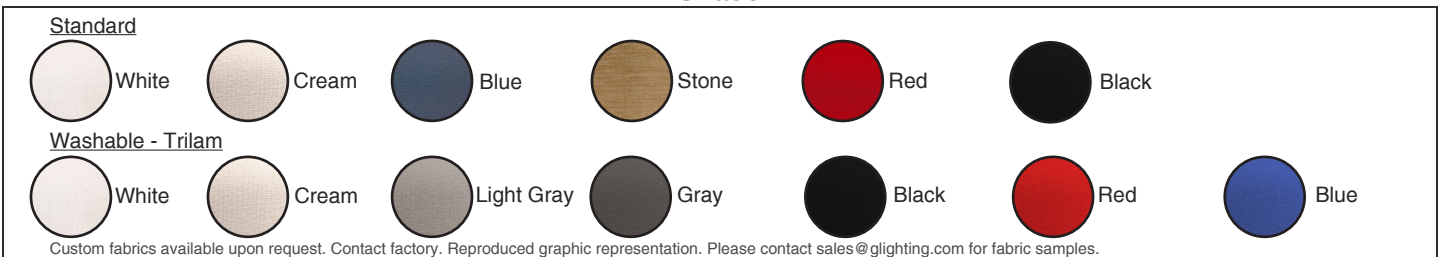

Light Source Definition

Code	Lamp	Type	Lamp Base	Code	Lamp	Total Wattage	Delivered Lumens	Kelvin	CRI
IN3,IN6	MED	A-19	Medium 120V	LL50	5LED30LO	39W	4462	3000	+90
		Total	Delivered	LL55	5LED35LO	39W	4462	3500	+90
Code	Lamp	Wattage	Lumens	Kelvin	LL54	5LED40LO	39W	4462	+90
LL10	1LED30LO	17 W	1825	3000	L50	5LED30	65W	7436	3000 +90
LL15	1LED35LO	17 W	1825	3500	L55	5LED35	65W	7436	3500 +90
LL14	1LED40LO	17 W	1825	4000	L54	5LED40	65W	7436	4000 +90
L10	1LED30	27 W	3008	3000	LL80	8LED30LO	63W	7126	3000 +90
L15	1LED35	27 W	3008	3500	LL85	8LED35LO	63W	7126	3500 +90
L14	1LED40	27 W	3008	4000	LL84	8LED40LO	63W	7126	4000 +90
					L80	8LED30	105W	12248	3000 +90
					L85	8LED35	105W	12248	3500 +90
					L84	8LED40	105W	12248	4000 +90

Universal Voltage unless otherwise specified.
Contact factory for availability of other lamp configurations.

