

MONTEREY

Interior ADA Fabric Sconce



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

Shade: Standard white fabric shade. Custom shapes, sizes, and colors available.

Lamping: Standard lamping packages offer +90CRI long lamp life, high power factor energy efficient electronic driver. 1% 0-10v dimming standard.



Acrylic: UL-94 HB Flame Class rated. Standard white opal top and bottom lens.

Standard Finish: Highly durable oven cured no VOC premium powder coat.

Custom: Contact factory for custom lengths and lamping.

LED: Driver mounted in 4" square x 2 1/8" deep junction box:
Steel City #52171 or equivalent (supplied by others)


Surge Protection: External surge protector provided as standard.

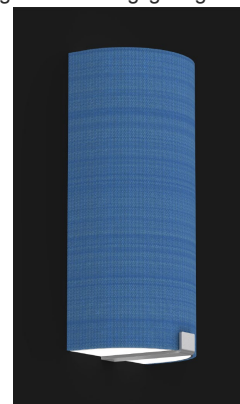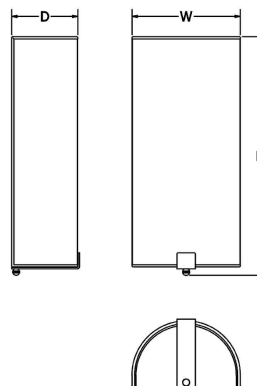

SAMPLE CATALOG NUMBER: GL-4705-		B-	W-	NSN-	A
MODEL NO.		LAMPING	SHADE	FINISH	OPTION(S)
GL-4705	W in 6" mm 150 H in 12 5/8" mm 330 D in 3 7/8" mm 100 4lbs 1.8kg	A. 13LED30 B. 13LED35 C. 13LED40	W White C Cream BL Blue BK Black S Stone R Red	Standard: Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze PG-Pine Green DO-Deep Orange PV-Purple Violet NB-Navy Blue Textured Powder TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBZ-Textured Bronze TST-Stone	A. No Options EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. TD. Triac/ELV Dimming
GL-4706	W in 7" mm 175 H in 18" mm 460 D in 3 7/8" mm 100 5lbs 2.3kg	A. 13LED30 B. 13LED35 C. 13LED40	Washable: WW White WC Cream WLG Lt Gray WGR Gray WBK Black WR Red WBL Blue	Shade options may vary based on availability. Consult Finish Guide at glighting.com for current options.	

All Dimensions are nominal.

Shade

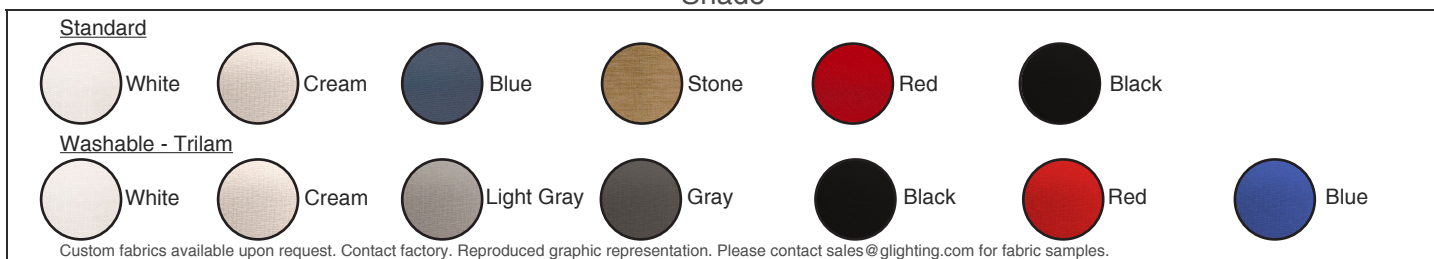

Lamp Definition

Lamp	LED	Kelvin	CRI	Rated Life Hrs	Delivered Lumens
13LED30	13W	3000	80	50000	1169
13LED35	13W	3500	80	50000	1169
13LED40	13W	4000	80	50000	1169

Universal Voltage unless otherwise specified.
Contact factory for availability of other lamp configurations.

