

### GENERAL SPECIFICATION

**Shade:** Standard white fabric shade. Custom shapes, sizes, and colors available.

**Lamping:** Standard lamping packages offer +90CRI long lamp life, high power factor energy efficient electronic driver. 1% 0-10v dimming standard.



**Acrylic:** UL-94 HB Flame Class rated. Standard white opal top and bottom lens.

**Standard Finish:** Highly durable oven cured no VOC premium powder coat.

**Custom:** Contact factory for custom lengths and lamping.

**LED:** Driver mounted in 4" square x 2 1/8" deep junction box:  
Steel City #52171 or equivalent (supplied by others)


**Surge Protection:** External surge protector provided as standard.

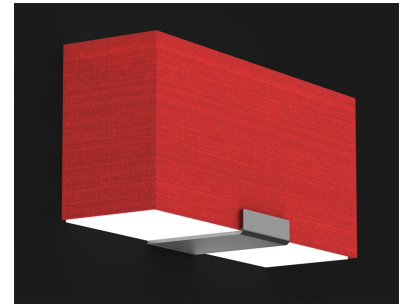

SAMPLE CATALOG NUMBER: GL-4710-				
MODEL NO.	B-	W-	NSN-	A
<b>GL-4710</b> W in 13" mm 330 H in 6" mm 150 4lbs D in 3 3/4" mm 95 1.8kg	<b>A.</b> 13LED30 <b>B.</b> 13LED35 <b>C.</b> 13LED40	<b>W</b> White <b>C</b> Cream <b>BL</b> Blue <b>BK</b> Black <b>S</b> Stone <b>R</b> Red  Washable: <b>WW</b> White <b>WC</b> Cream <b>WLG</b> Lt Gray <b>WGR</b> Gray <b>WBK</b> Black <b>WR</b> Red <b>WBL</b> Blue  Shade options may vary based on availability. Consult Finish Guide at <a href="http://glighting.com">glighting.com</a> for current options.	<b>Standard:</b> Powder Coat <b>BLK</b> -Black <b>BL</b> -Blue <b>GR</b> -Gray <b>LG</b> -Light Gray <b>BE</b> -Beige <b>PAB</b> -Antique Brass <b>PA</b> -Painted Aluminum <b>PTC</b> -Painted Copper <b>WH</b> -White <b>DBZ</b> -Dark Bronze <b>NSN</b> -New Satin Nickel <b>BRN</b> -Brown <b>RD</b> -Red <b>CH</b> -Champagne <b>RG</b> -Reed Green <b>SG</b> -Sungold <b>GM</b> -Gun Metal <b>POR</b> -Oil Rubbed Bronze <b>PG</b> -Pine Green <b>DO</b> -Deep Orange <b>PV</b> -Purple Violet <b>NB</b> -Navy Blue  <b>Textured Powder</b> <b>TLV</b> -Light Verdigris <b>TWH</b> -Textured White <b>TBL</b> -Textured Black <b>TS</b> -Textured Silver <b>TBZ</b> -Textured Bronze <b>TST</b> -Stone	<b>A.</b> No Options <b>EL.</b> Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. <b>TD.</b> Triac/ELV Dimming

All dimensions are nominal.

### Shade

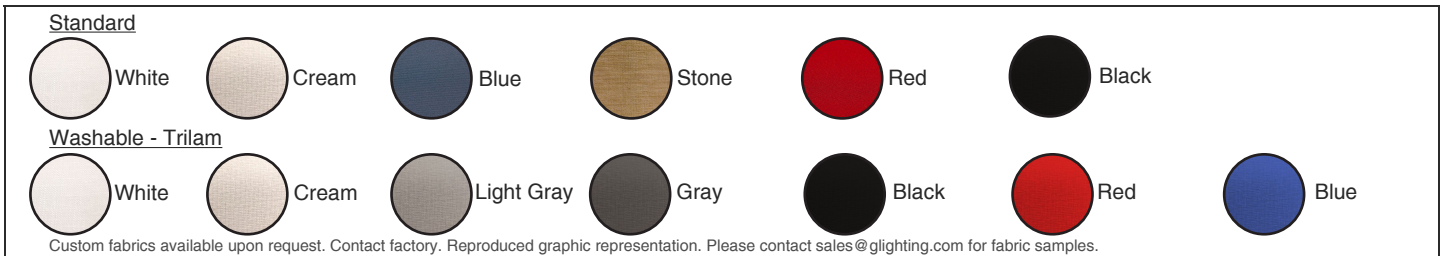

### Lamp Definition

Lamp	LED	Kelvin	CRI	Rated Life Hrs	Delivered Lumens
13LED30	13W	3000	+90	50000	1300
13LED35	13W	3500	+90	50000	1300
13LED40	13W	4000	+90	50000	1300

Universal Voltage unless otherwise specified.  
Contact factory for availability of other lamp configurations.