

OXFORD

Interior Pendant






9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs are field serviceable.
- LED Dimming:** Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request. Driver mounted in the canopy.
- Acrylic:** White acrylic is UL-94 HB Flame Class rated with seam.
- Cable Hanger:** Comes with 72" cable and white cord for on-site adjustability.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Surge Protection:** External surge protector provided as standard.

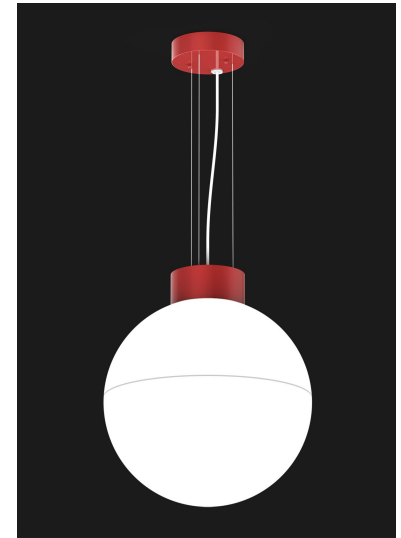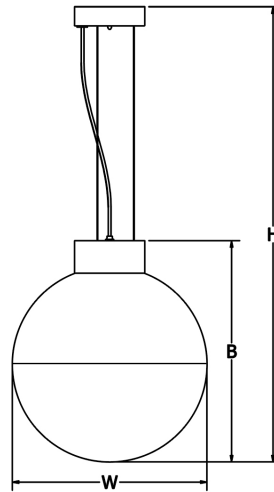

SAMPLE CATALOG NUMBER:				
GL-2525-	Z5-	NSN-	1-	A-
MODEL NO.	LAMPING	FINISH	HANGER	OPTIONS
GL-2525 W 18" in 460 mm 15lbs B 20 1/2" in 520 mm 6.8kg H 72" in 1065 mm	Y0. 11LED30 Y5. 11LED35 Y4. 11LED40 Z0. 16LED30 Z5. 16LED35 Z4. 16LED40	Standard: Powder Coat BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze PG -Pine Green DO -Deep Orange PV -Purple Violet NB -Navy Blue Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBZ -Textured Bronze TST -Stone	1. Cable  Standard White Power Cord	A. No Options BC. Black Cord Fixture supplied with black power cord. LC. 150" Cord & Cable Fixture supplied with 150" of cable and standard white cord or optional black cord. EL. Emergency LED Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.

All Dimensions are nominal.

Light Source Definition

Code	LED	Kelvin	Rated Life Hrs	Board Lumens
11LED30	11W LED	3000	50000	1460
11LED35	11W LED	3500	50000	1460
11LED40	11W LED	4000	50000	1460
16LED30	16W LED	3000	50000	2020
16LED35	16W LED	3500	50000	2020
16LED40	16W LED	4000	50000	2020

Universal Voltage unless otherwise specified.